



Collection 2026

LIGHTPRO

Ambiance
at
its
best!

Find out what **garden lighting** means for your **outdoor spaces**



See Lightpro in real life!
Scan the QR code and immediately
locate the nearest point of sale!

Why 12 volt? Because it is safe, easy to install and energy efficient. No hassle with digging or complicated installations – just plug and play!

Whether you want to illuminate a cozy garden, a sleek patio or a driveway. Lightpro has everything you need: from powerful spotlights to stylish wall lights and elegant post lights. And the best part? You can easily expand the system whenever you wish.

Are you a professional in the gardening sector? Then you've come to the right place. We partner with you to offer smart solutions and are always happy to answer any questions you might have.

This brochure contains our complete range: fixtures, accessories and plenty of inspiration. Be amazed by the possibilities and start creating your perfect outdoor experience today.

Team Lightpro



Contents

Effect of garden lighting	8
The power of our system	10
Lighting & cable plan	12
New in our range	14
Let's get Smart!	18
Safety	20
Nature	22
Decorative lights	24
Spotlights	30
Decklights	40
Uplights	44
Post lights	48
Wall lights	56
Smart	64
The system	70
Accessories	74
Technical information	82

From darkness to a great mood



Without lighting

With lighting

A garden without garden lighting disappears in the dark. Our garden lighting brings your outdoor space to life, especially after sunset. Create a great mood, higher levels of safety and more style with our smart and easy-to-install system. The differences are astonishing: from a dark, unremarkable garden to an inviting place full of warmth and character. Discover the power of light!



The benefits of our 12-volt system

Energy efficient & sustainable

Our fixtures are equipped with LED lighting:

- Very low energy consumption
- Long service life

Dutch design

Designed and manufactured in our own innovation center:

- Dedicated team
- Top quality
- Stylish range

Safe for everyone

Lightpro operates at low voltage:

- Safe for humans and animals

Convenient & flexible

The 12-volt system is easy to install:

- No electrician required
- Quick to install
- Easy to expand
- Cable does not need to be buried

6-year warranty


Assurance and confidence in every product.

Lighting plan

Outdoor lighting is indispensable these days. Our 12-volt system allows you to easily create an inviting atmosphere and increase security around your home. No idea where to start? Start with a smart lighting plan! In the evening, consider where you would like lighting and determine which fixtures you need. Follow the steps below and let your garden shine!

Cable plan

A good cable plan is the basis for a reliable and tidy installation. A well-thought-out cable plan prevents any unwanted surprises. Determine where your fixtures will be placed and choose smart cable routes that fit your garden design. Create different zones by using branches.

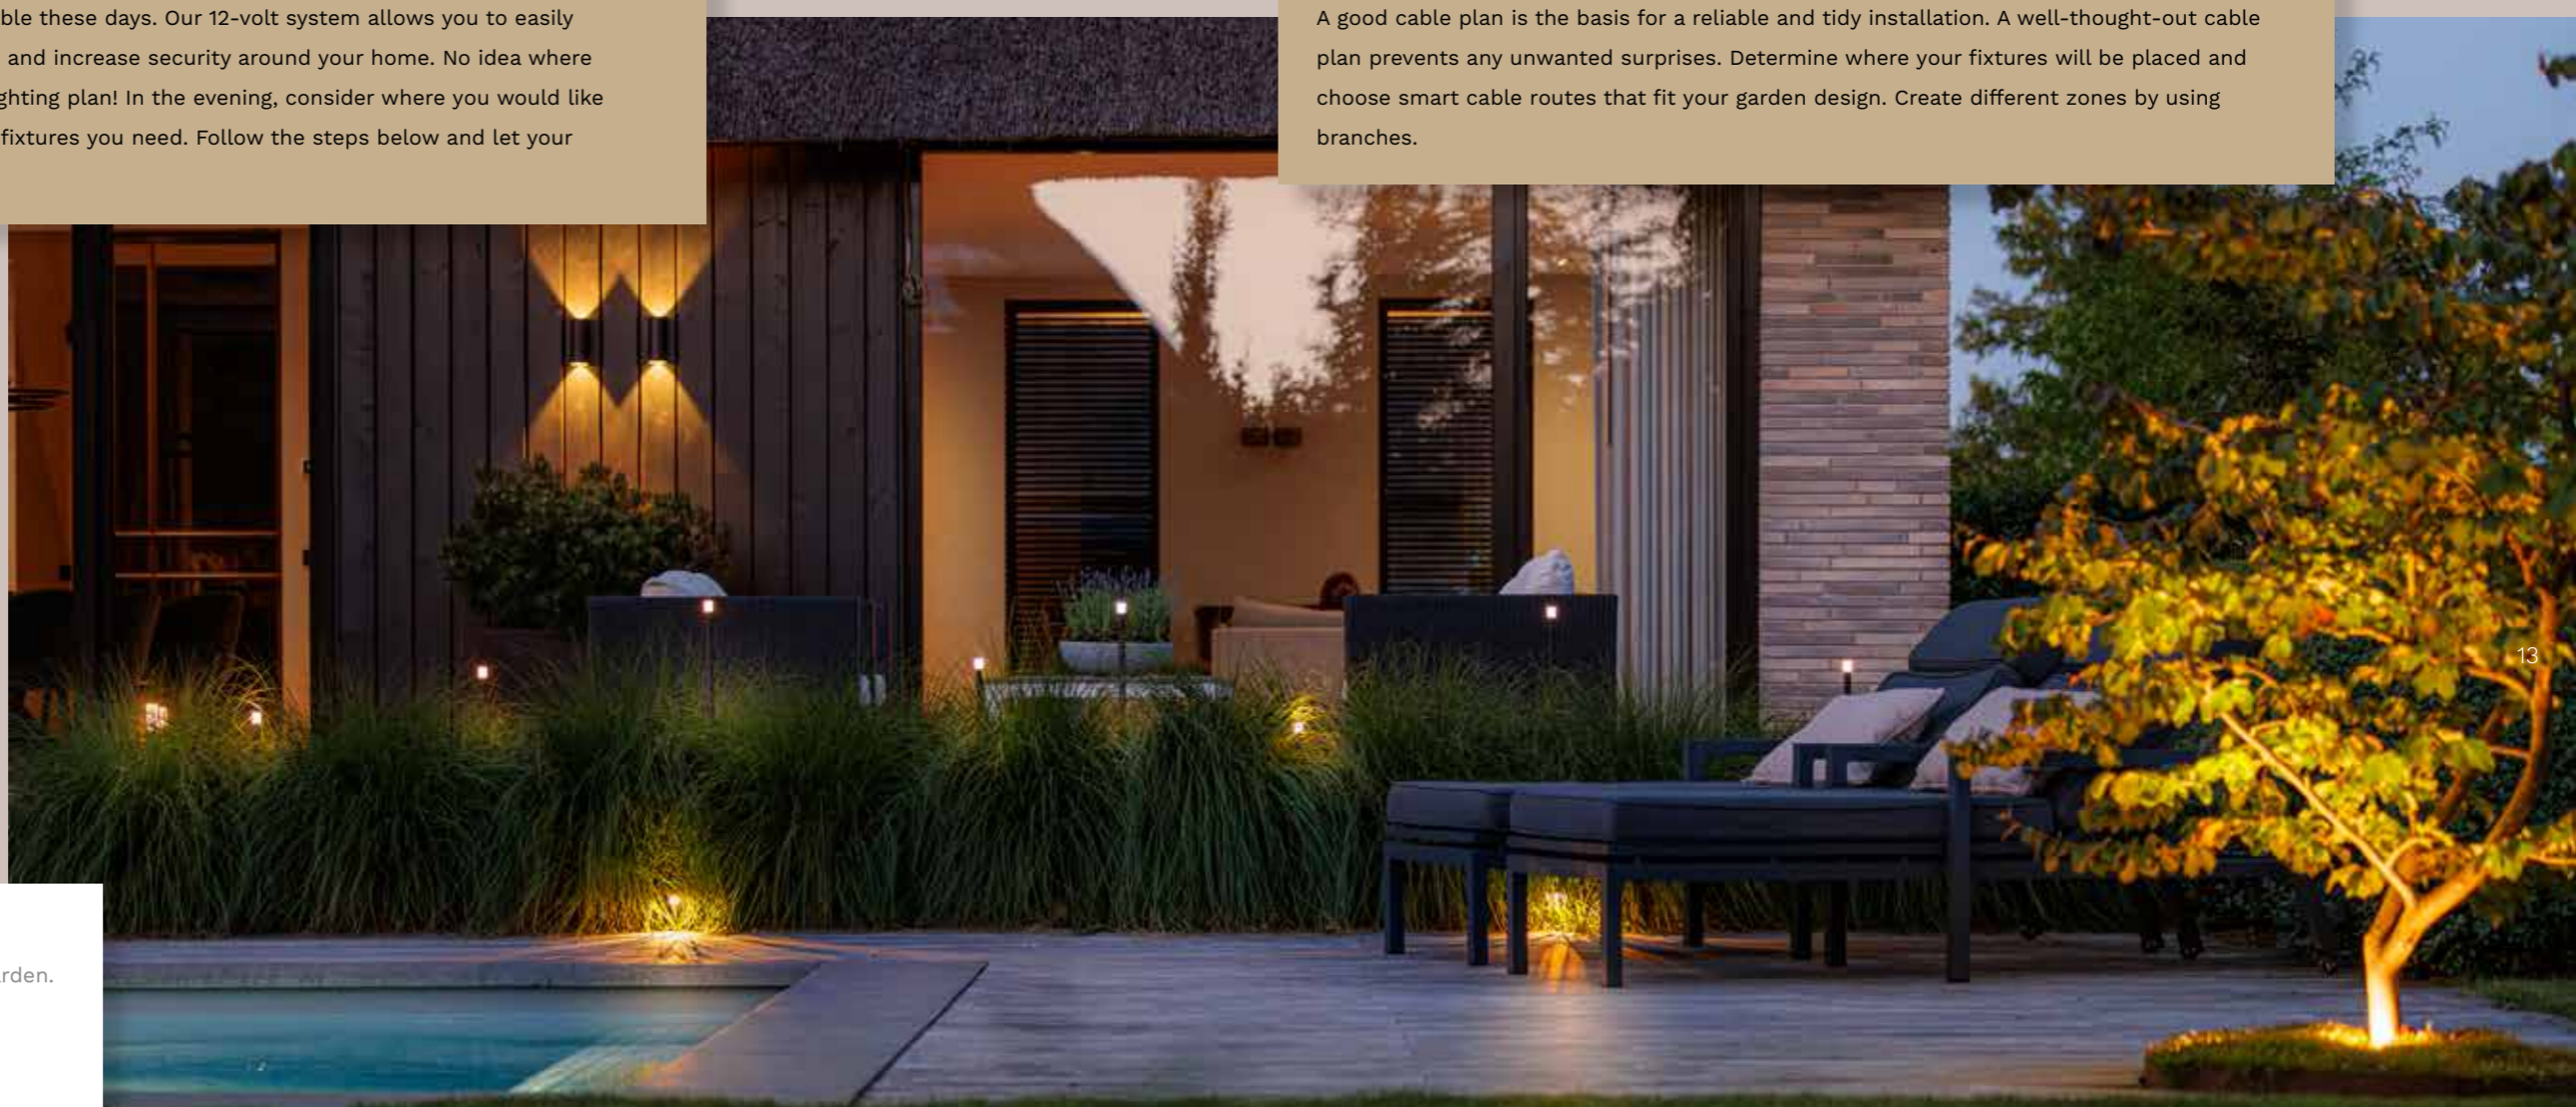

1 | Make a sketch of your garden.

2 | Map out which elements you really want to illuminate.

3 | Determine whether your lighting should be functional or Decorative lights.

4 | Select the fixtures that reflect the style of your garden.

**Need help creating your lighting or cable plan?
Please contact the Lightpro Customer Support team!**



Use our product configurator to design your 12-volt system.

1 | Draw a rough sketch based on the lighting plan and start with the transformer(s). Unsure whether or not you need one or more transformers, or which ones you need? Just add up the wattage of your chosen fixtures and accessories.

2 | Starting with the transformer, draw the cables along the lighting. Note down the number of meters of cable you need. Did you know that with Lightpro you can make branch connections from the transformer? See our system explanation on Page 72.

New in our range



New

This handy light allows you to illuminate all the greenery in your garden to create a great mood. This is because this lighting fixture is partially flexible and can therefore be used in many different ways to provide illumination at the best angle. Focus on a beautiful statue, an attractive shrub, or large ornamental grasses. You decide!

Xible Hi (263S)

Aluminum - Black
LED 2.1 W
2,700 K
187 lm
900 x 40 x 40 mm (H x W x D)

90 cm



New



New

Smart

Let the Senso Smart illuminate the façade in a color that you like. This uplight can be operated entirely according to your wishes. Blue, red or rather bathed in a warm white light? The Lightpro app allows you to easily set the color of the light, its brightness, or what time it should turn on or off. Everything can be easily controlled from your own phone or tablet.

Senso Smart (Zigbee) (265N)

Aluminum - Black
LED 7 W
640 lm
39 x 162 x 31 mm (H x W x D)
Gateway required

The Lino is 60 cm high and equipped with a vertical LED strip that provides an even light, which is ideal for path lighting. Additionally, the brightness can be easily adjusted by manually setting it to one of six dimmer settings. The vertical light creates a contemporary look that is suitable for illuminating driveways, garden paths, and hedges.

Lino (264P)

Aluminum - Anthracite
LED 6 W
3,000 K
27 - 140 lm
600 x 40 x 40 mm (H x W x D)





The Honeycomb for the Castor and Juno is an accessory that ensures even light distribution and prevents glare, creating pleasant and appealing lighting. Made from high-quality material, this Honeycomb is durable and resistant to all weather conditions. If you want a focused beam of light that does not dazzle, choose the anti-glare hood.



Camera mounting kit (257A)

New

Aluminum - Black
33 x 50 x 50 mm (H x W x D)
Required for attaching the Camera Smart to the Multispike.

Place the Castor, Juno, or Camera Smart higher in the border with the adjustable Multispike. This handy spike enables you to place the spotlights and Camera Smart at different heights in the garden, ranging from 40 to 60 cm. Use the ground spike supplied with the Juno or Castor to secure the Multispike firmly in the ground. Would you like to use the Multispike in combination with Camera Smart? Then order the Camera Mounting Kit!



Honeycomb Castor (252A)

New

Aluminum/plastic - Black
39 x 64 x 64 mm (H x W x D)
Easy to attach to the Castor 4, 8, and 9.



Honeycomb Juno (251A)

New

Aluminum/plastic - Black
33 x 50 x 50 mm (H x W x D)
Easy to attach to the Juno 2, 4, and Juno Tube.



Anti-glare hood (258A)

New

Aluminum - Black
110 x 64 x 64 mm (H x W x D)
For the Castor 4, 8 and 9.



Multispike (253A)

New

Aluminum - Black
390 x 30 x 30 mm (H x W x D)
For placing Castor, Juno, or Camera Smart in a higher position. Height adjustable from 40 to 60 cm.



Let's get Smart!

Curious about all our Smart products?



Check them out from Page 64 or directly online.



Bring your garden to life with our Smart product line. Easy to operate with the Lightpro app. Our smart solutions operate on the basis of Zigbee and Wi-Fi technology:

Zigbee ensures that your smart devices communicate with each other in a so-called 'mesh network'. As a result, Zigbee products act as mutual boosters, enabling you to also install your lights in spots where there is no Wi-Fi coverage—ideal for larger gardens! Additionally, Zigbee consumes little energy, which means your smart products last longer.

Wi-Fi is a wireless internet connection. So you can control your Lightpro system from anywhere in the world with the Lightpro app. At home, work, or on vacation? You're always in control. The app allows you to use handy features such as the astronomical clock and weather forecasts, making your garden lighting even smarter.



The Lightpro app allows you to easily set timers, determine the desired light color for yourself and decide what the Motion Sensor should do when detecting movement. The app is available from the App Store and Google Play.

Lightpro's smart accessories give you complete control over your outdoor lighting. If you want to upgrade your existing Lightpro system to a smart system, Smart Switch offers an easy solution. Alternatively, install the Smart Motion Sensor to detect motion, and define a response. Do you want one light to turn on when there is motion? or several lights at once, perhaps even in a different color such as red? Our easy-to-use app gives you complete control!



Download the free Lightpro app here.

Safety in your garden with outdoor lighting from Lightpro!

Safe

Unsafe

A well-lit garden not only creates a great mood, but also contributes to the safety of your outdoor space. Regardless as to whether you're enjoying a quiet moment in the garden in the evening or need to be sure you can enter your home safely. An illuminated garden provides better visibility for paths and dark areas, so you can see clearly where you're walking. What's more, it has been proven that outdoor lighting helps keep uninvited guests out.

1

Illuminated walkways

It's important that you have a clear view of the paths in your garden, especially in the dark. Poorly lit paths increase the risk of tripping or slipping, especially if it's wet or icy. Installing Lightpro decklights or post lights along paths provides clear marking and makes walking much safer.

Post lights [page 48](#)

Decklights [page 40](#)

2

Stair lighting

Do you have steps in your garden or on your patio? It's essential to illuminate them properly. You can make your steps safe with subtle recessed spotlights or LED strips, among other solutions. Not only does this look stylish, but it also ensures that you can see where you are walking in the dark.

Decklights [page 40](#)

Decorative lights [page 24](#)

3

Motion detector

The Motion Sensor Smart is an excellent choice for increasing security around your home. You can set lights to come on and go off as preferred, and have them switch on automatically as soon as someone approaches. This not only deters unwanted visitors, but also immediately provides lighting when you enter the garden or driveway yourself.

Motion Sensor Smart [page 68](#)

4

Durable and safe materials

Lightpro lighting is known for its durable and robust materials, ensuring your lighting can withstand any weather conditions.

LED Strip [page 26](#)

5

Accent lighting for orientation

By illuminating specific trees, shrubs, or other fixed elements in your garden, you not only create a great mood, but you also make obstacles clearly visible. Lightpro accent lighting helps you to better recognize the structure of your garden at night and prevents unexpected collisions.

Decklights [page 40](#)

Uplights [page 44](#)

6

Smart lighting and timers

Smart lighting from Lightpro or the use of timers helps you to ensure that your garden is always lit at the right time. This not only increases comfort, it also boosts safety, as your garden is never completely shrouded in darkness. Set the lighting so that it turns on automatically as soon as the sun sets.

Let's get Smart [page 18](#)

Tip

Garden lighting plays a crucial role in increasing safety around your home. Strategically placed Lightpro light fixtures make your garden a more attractive place, prevent accidents, and keep unwanted visitors out.

Decorative lights for your garden without disrupting nature

Why animal-friendly lighting?

Why animal-friendly lighting?

Bright or misdirected lighting can disrupt the natural rhythm of animals. This includes birds that lose their sleep rhythm or insects that are attracted to light and become exhausted. Fortunately, with a few smart choices, you'll be illuminating your garden in an appealing and nature-friendly way.

Smart lighting that respects nature

Did you know that red light is barely visible to insects? With our smart fixtures, you can set the color yourself—for example, you can choose red light in the evening hours, which is insect-friendly and creates a pleasant atmosphere. Birds also benefit from warm light. Bright white or blue light can disturb their rest. So, consciously opt for lighting that supports their natural rhythm.

Less light pollution, better mood

Our lighting allows you to direct the light exactly where you need it. No unnecessary light pollution, but a garden that glows in the evening. This means you enjoy a pleasant mood and help nature at the same time.

Using the right settings and our smart products allows you to create a garden that is not only beautiful, but also takes into account everything that lives in it. This transforms your outdoor space into a place where both you and nature feel at home.

How to do it: tips for an animal-friendly garden

- **Color temperature:** Choose warm white light between 2,700 and 3,000 kelvin. This mimics the soft light from the sunset and is less disturbing to animals.
- **Light color:** Choose red light for smart fixtures. This is insect-friendly because they hardly notice it.
- **Luminous intensity:** Go for 100–300 lumens. That's enough for ambiance, but not too bright for insects.
- **Dimmable lights:** Adjust the brightness according to the time of evening.
- **Downlighters:** The light is directed downward, allowing birds and insects to fly safely and freely over it.
- **Astronomical clock:** Let your lighting turn on and off automatically based on daylight, ideal for the natural rhythm of animals.
- **Honeycomb and anti-glare hood:** Place these over the Castor 4, 8, and 9, Juno 2, 4 and Juno Tube for even light distribution or to prevent glare.

Decorative lights



Rodas (239R)

Aluminum - Black

LED 1.1 W (3x)


3,000 K

15 lm each

100 x 20 mm (H x Ø)

String of lights consisting of

3 lights each with 3 meters of cable.

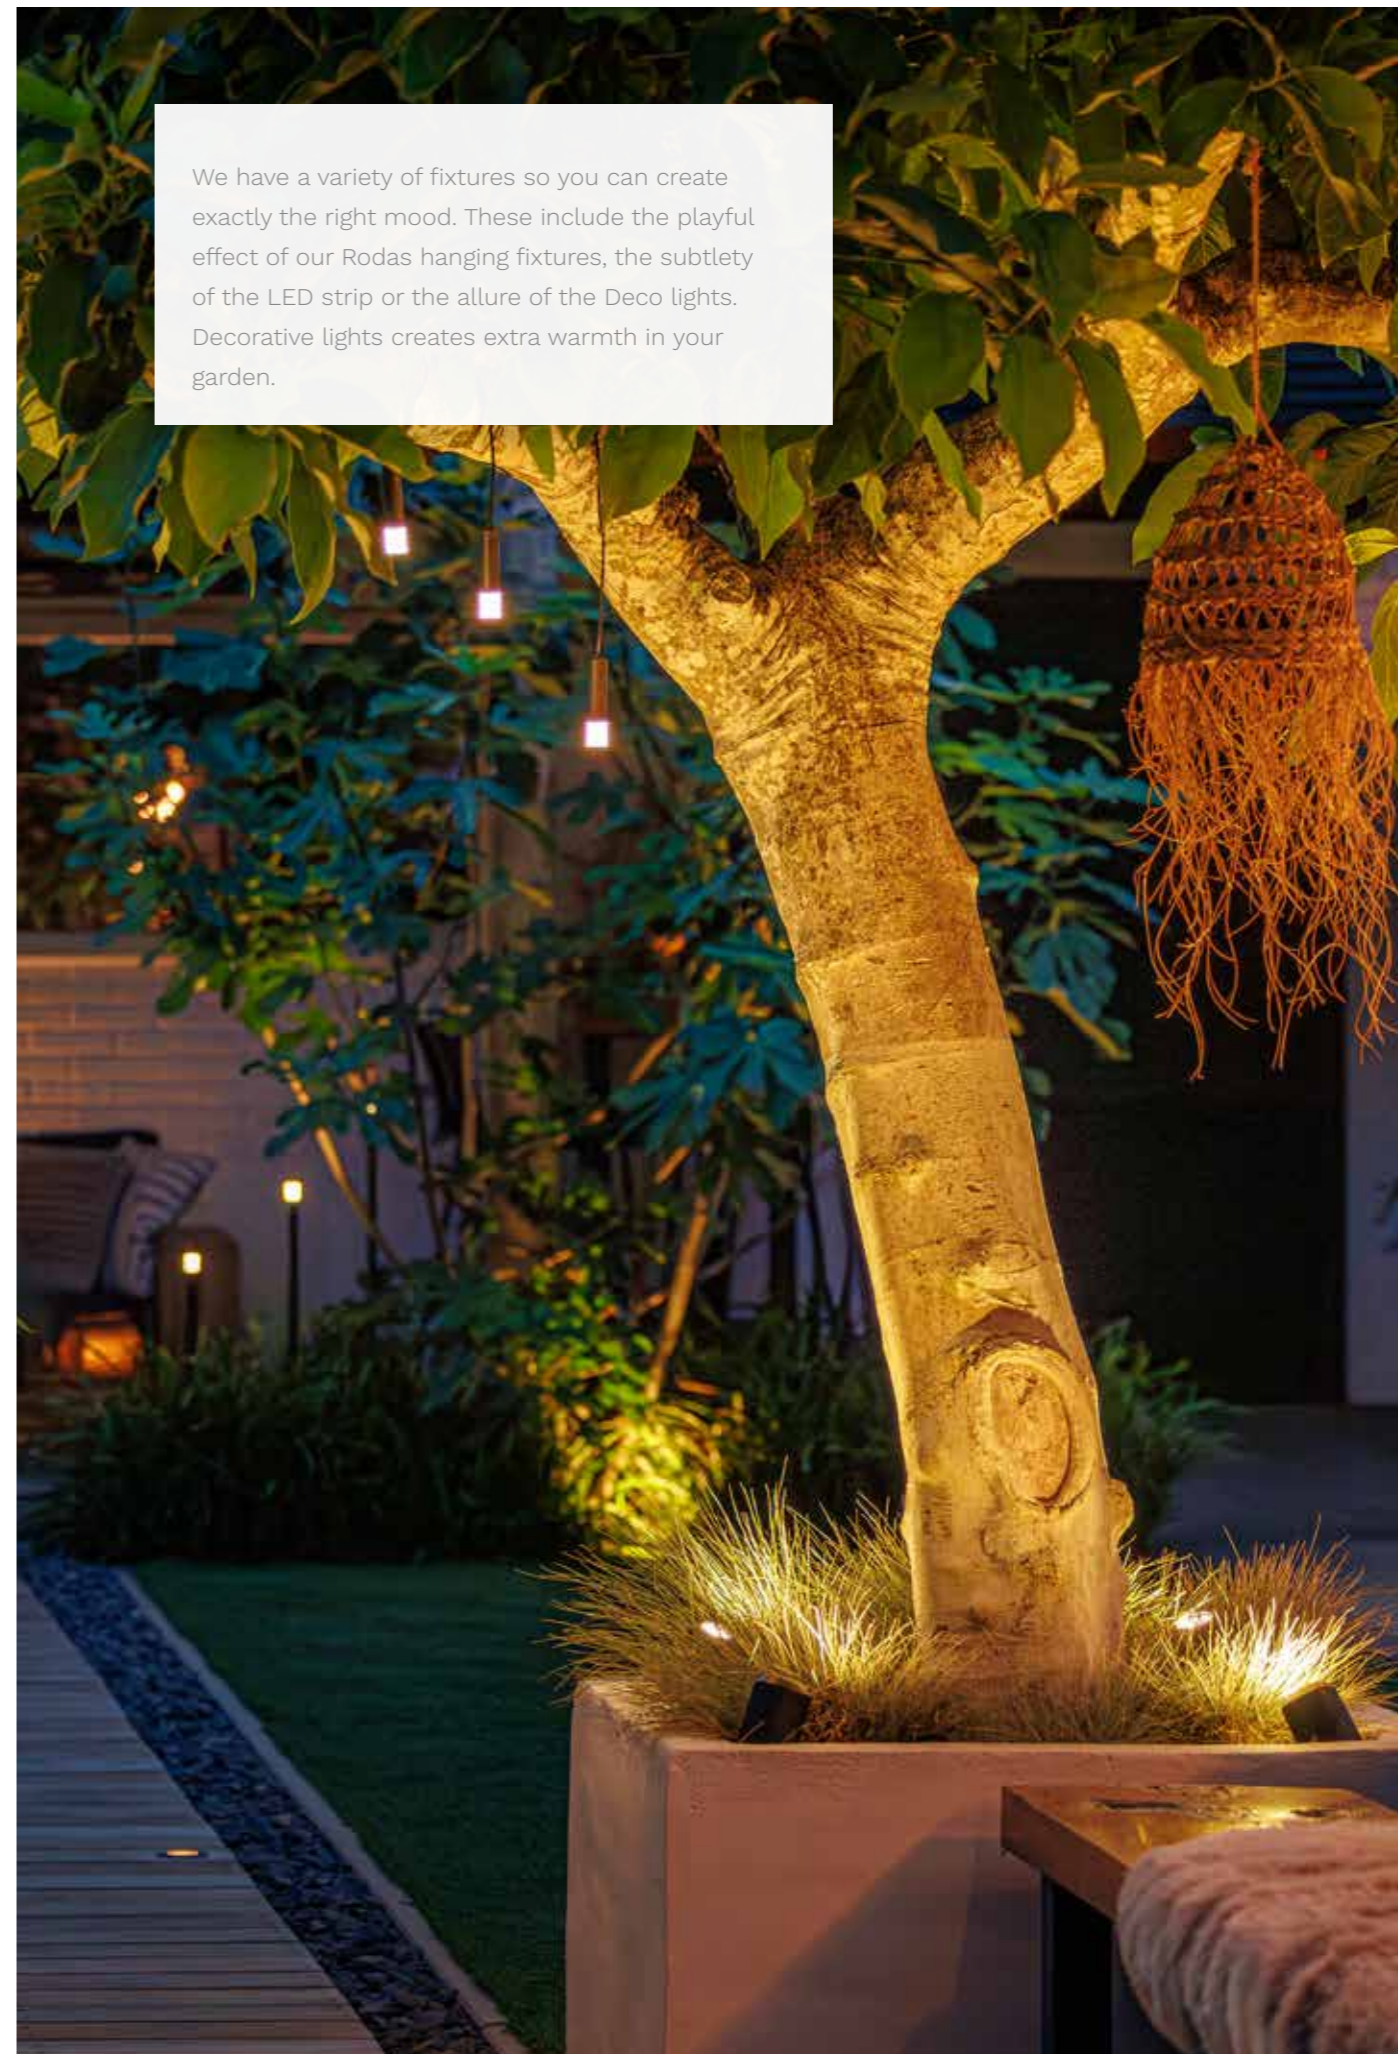

We have a variety of fixtures so you can create exactly the right mood. These include the playful effect of our Rodas hanging fixtures, the subtlety of the LED strip or the allure of the Deco lights. Decorative lights creates extra warmth in your garden.

The 15-meter LED strip can be cut to size. It's perfect for use alongside stairs, a border or in a canopy, for example. It increases safety and security in and around your garden, and enhances the atmosphere. The LED strip is easy to install using our LED strip clips.

LED strip (175L)



Plastic

LED 2.2 W (per meter)

3,000 K

90 lm / m

15 x 10 x 15,000 mm (H x W x D)

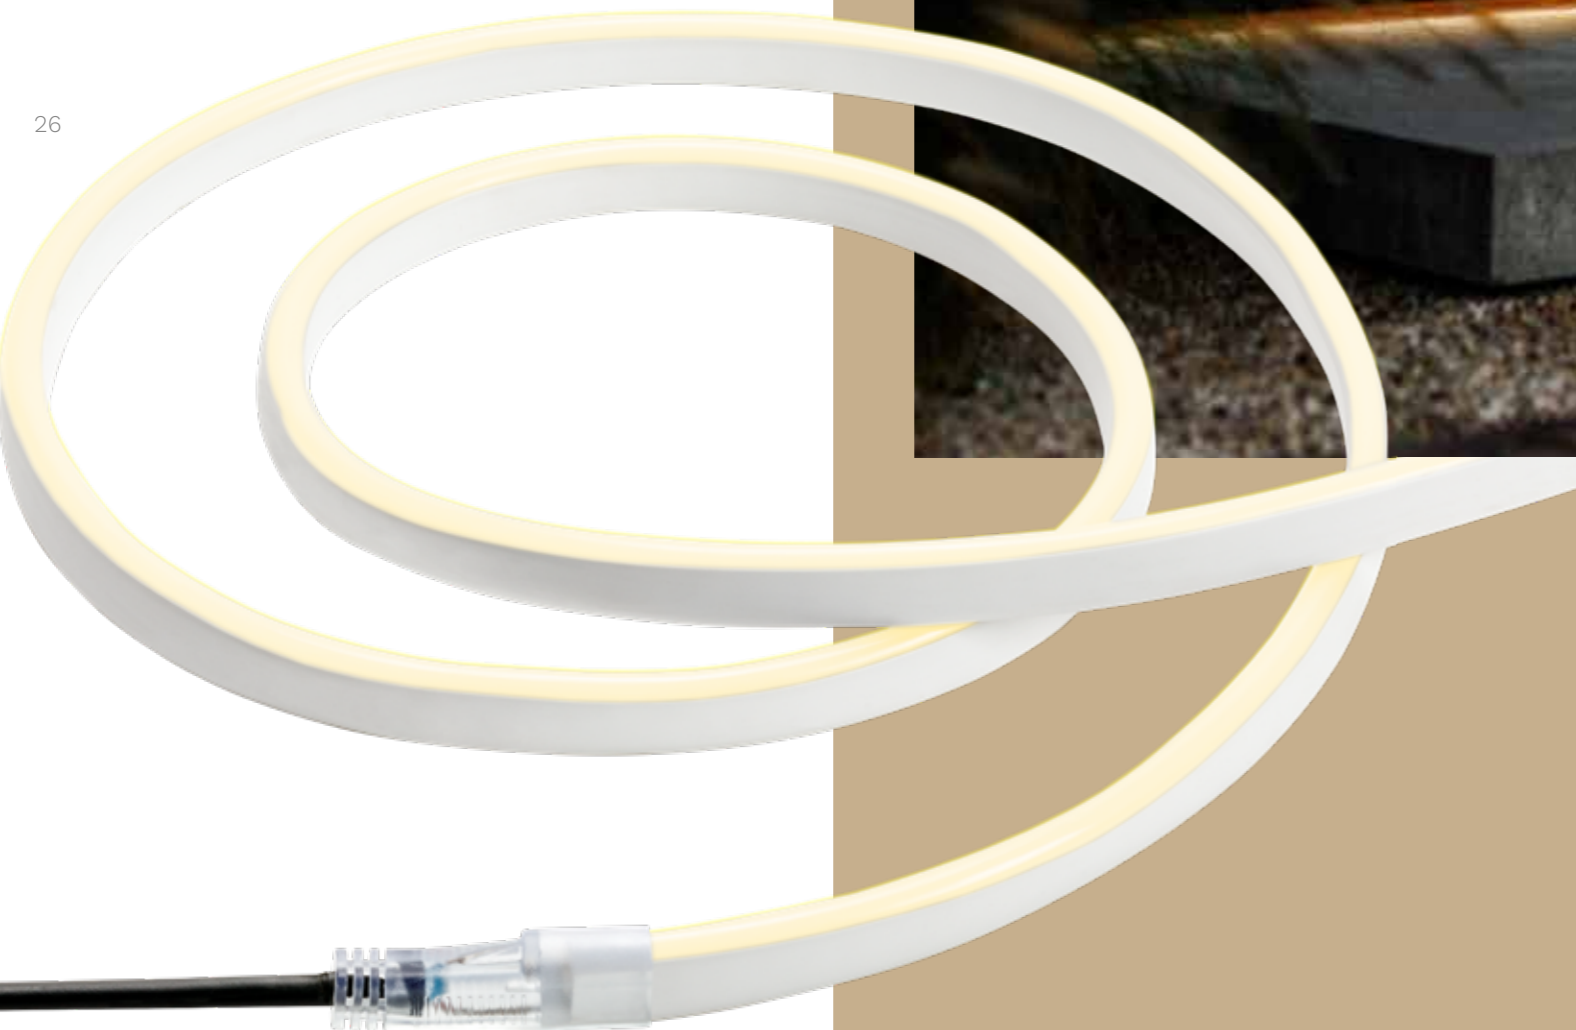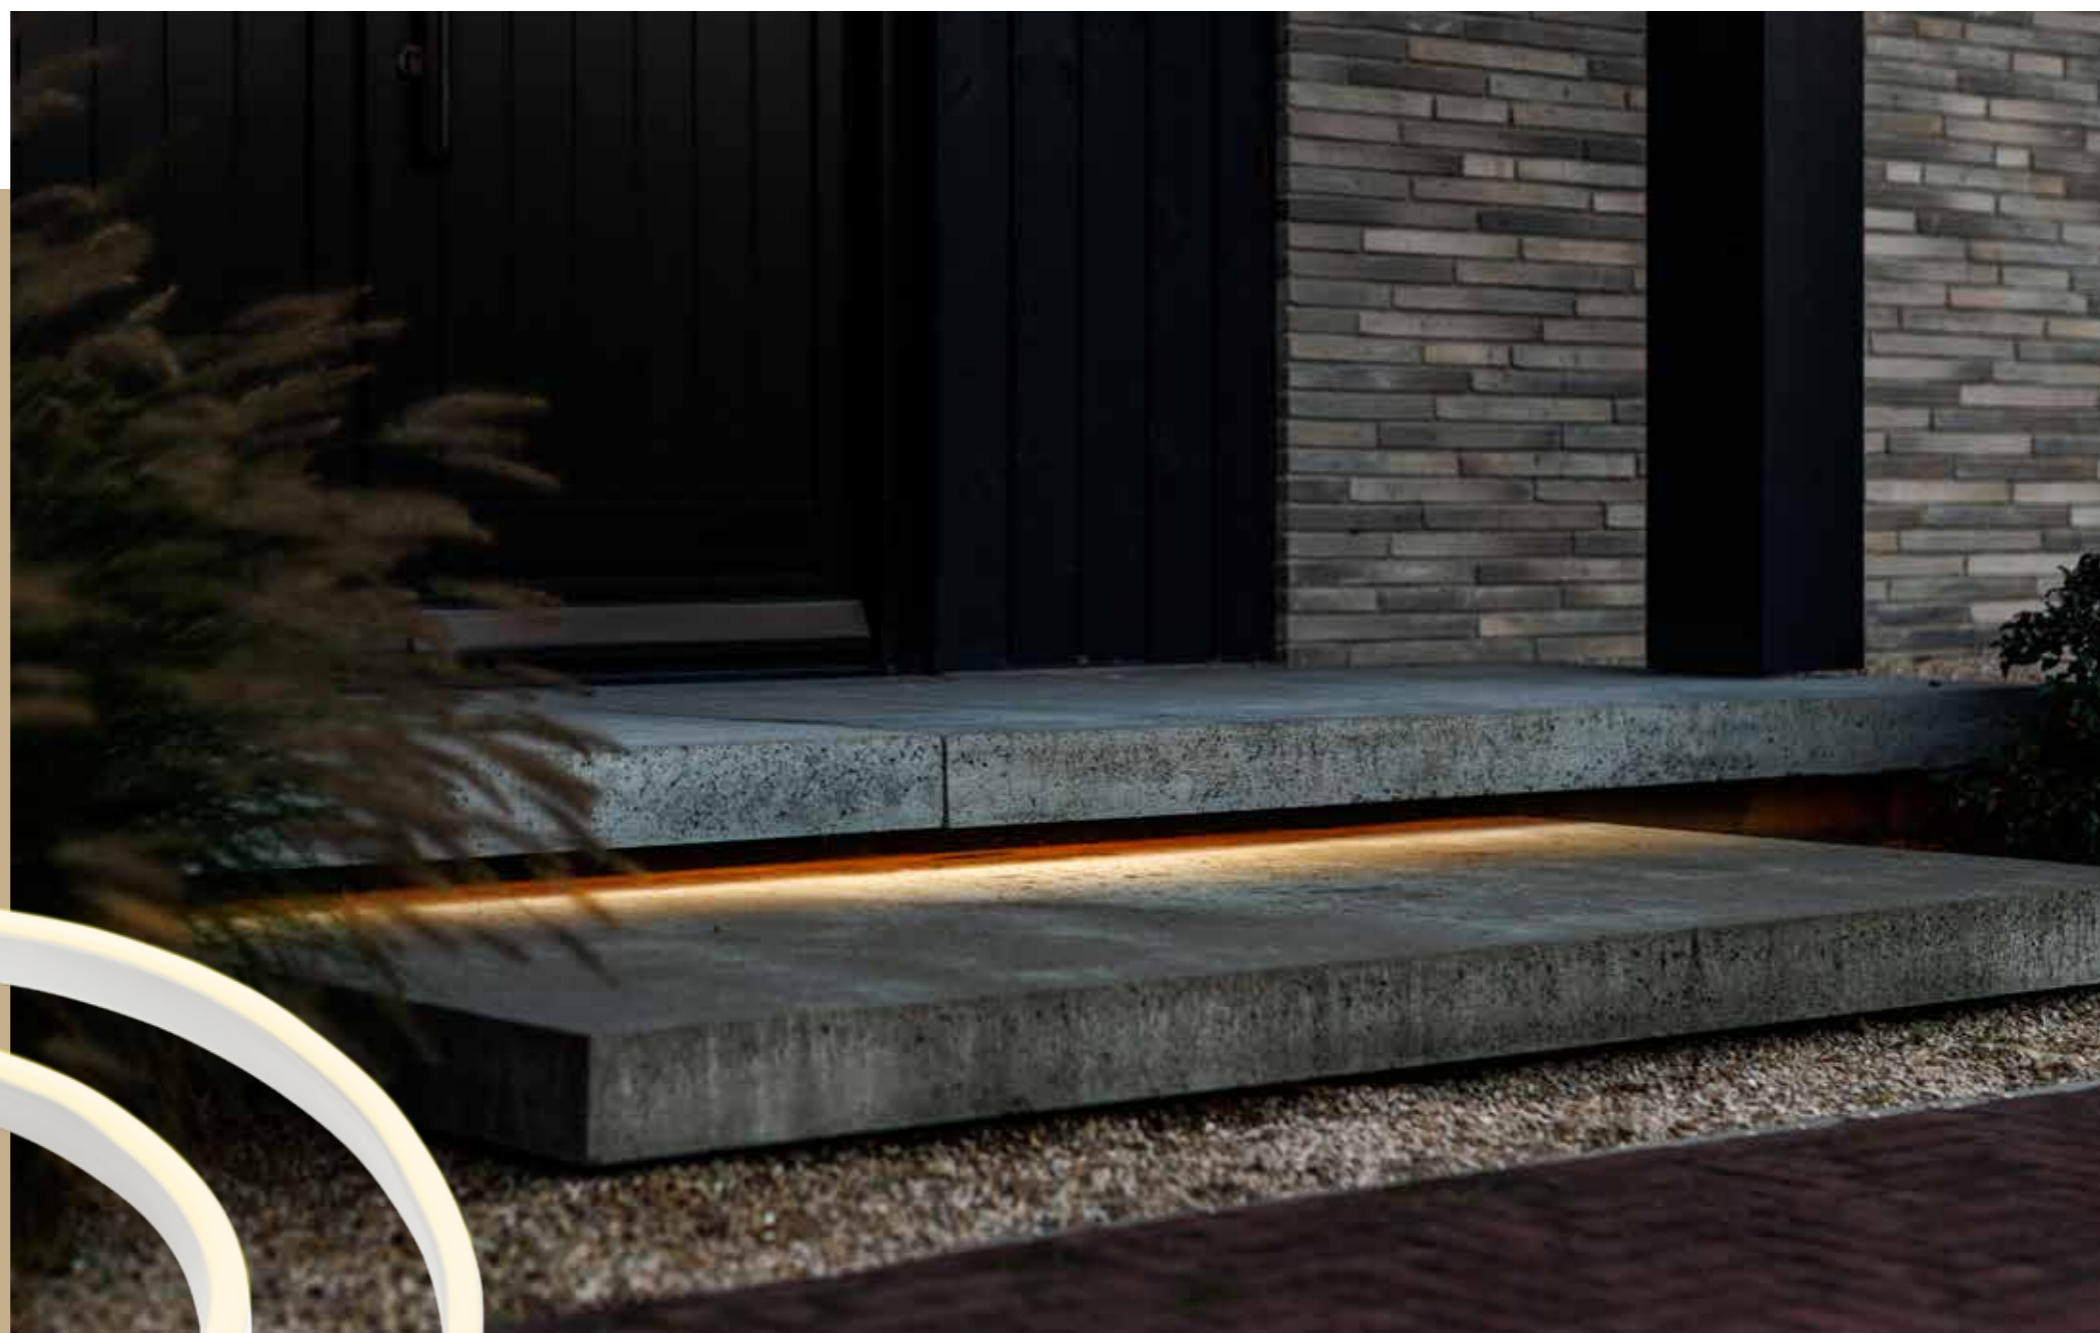

LED strip clips (250L)

Aluminum

60 pieces

Screws and plugs included.

9 x 11 x 17 mm (H x W x D)




LED strip connector (220L)

Plastic

27 x 27 x 60 mm (H x W x D)

Includes adhesive and end cap.

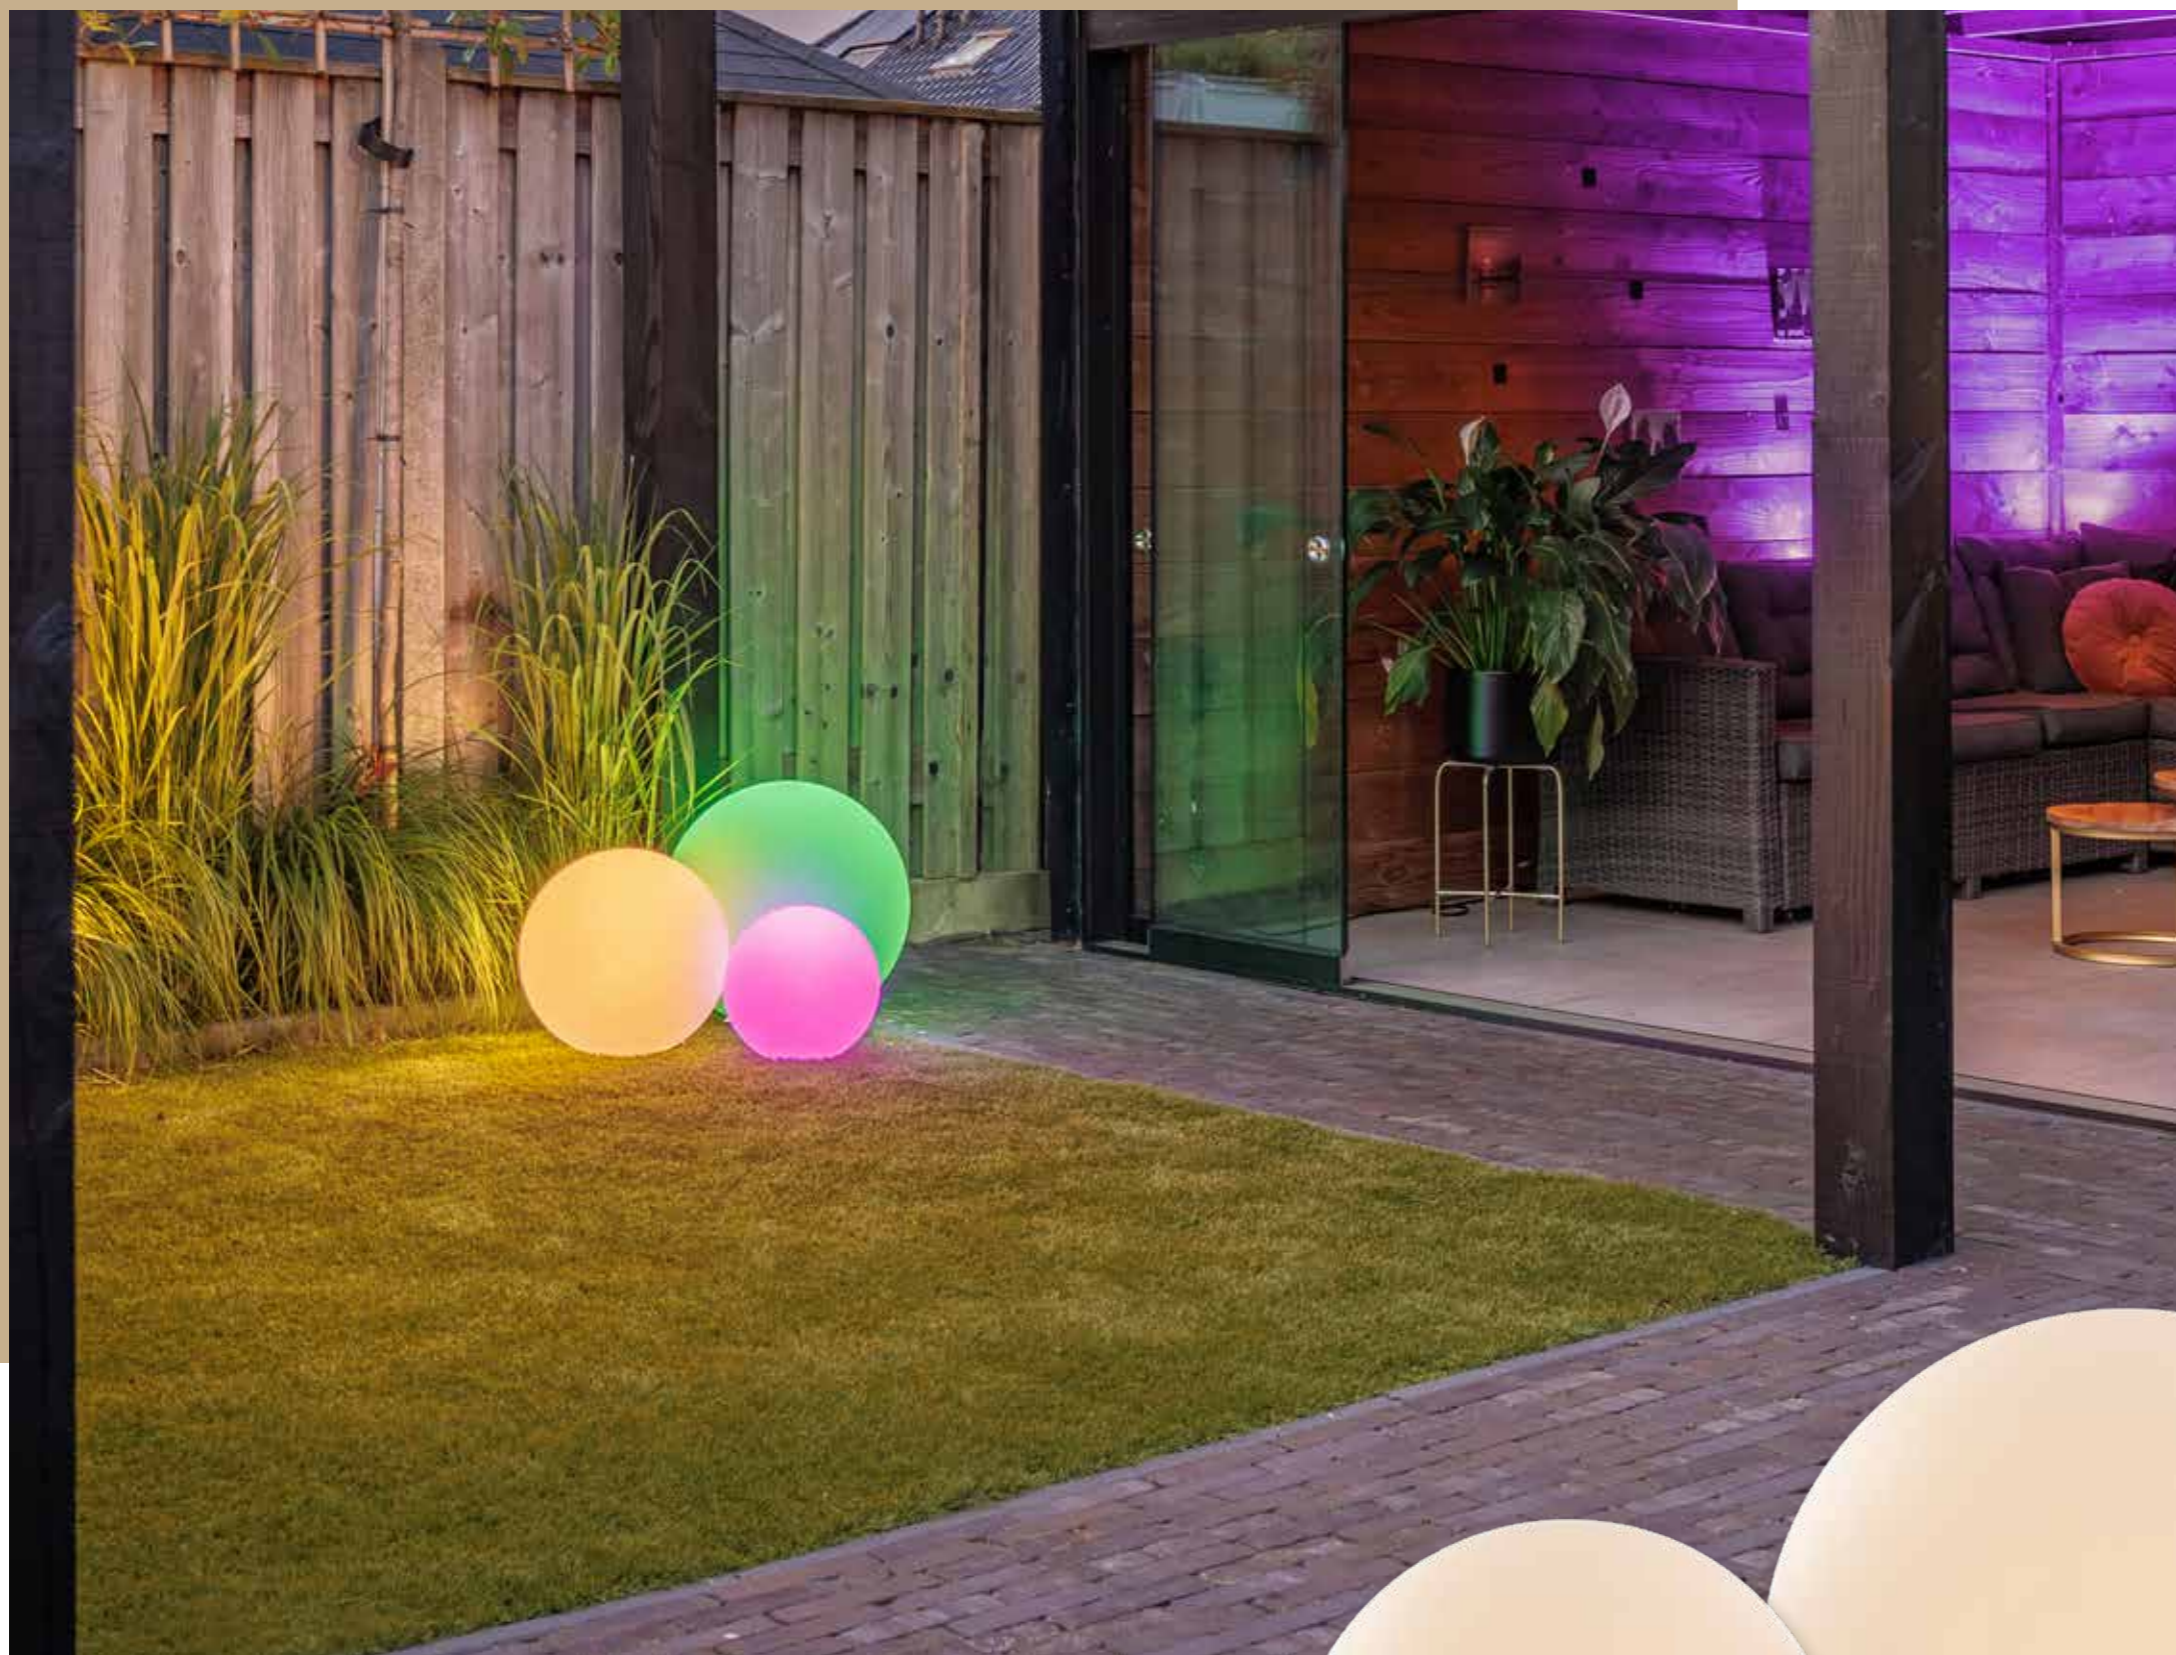

Deco 30 Smart (Zigbee) (254N)

Polyethylene - White
LED 5 W
254 lm
300 mm (Ø)
Gateway required

Deco 40 Smart (Zigbee) (255N)

Polyethylene - White
LED 5 W
242 lm
400 mm (Ø)
Gateway required

Deco 50 Smart (Zigbee) (256N)

Polyethylene - White
LED 5 W
220 lm
500 mm (Ø)
Gateway required

With groundspike and feet, easy to place on any surface.

Smart



• Each light is supplied with Connector F as standard.

spotlights

Tiga DL (209S)

Aluminum - Black

LED 4.2 W


3,000 K

9 - 85 lm

88 x 68 x 63 mm (H x W x D)



Want to attractively illuminate shrubs, trees and other objects? Then choose our spotlights with different lighting effects. Whether you want to illuminate a tree, accentuate a footpath, or beautifully light up your border, our spotlights offer a suitable solution. You'll literally be putting the feature 'in the spotlight'! If you prefer to play with the brightness, then our dimmable spotlights are what you're looking for.

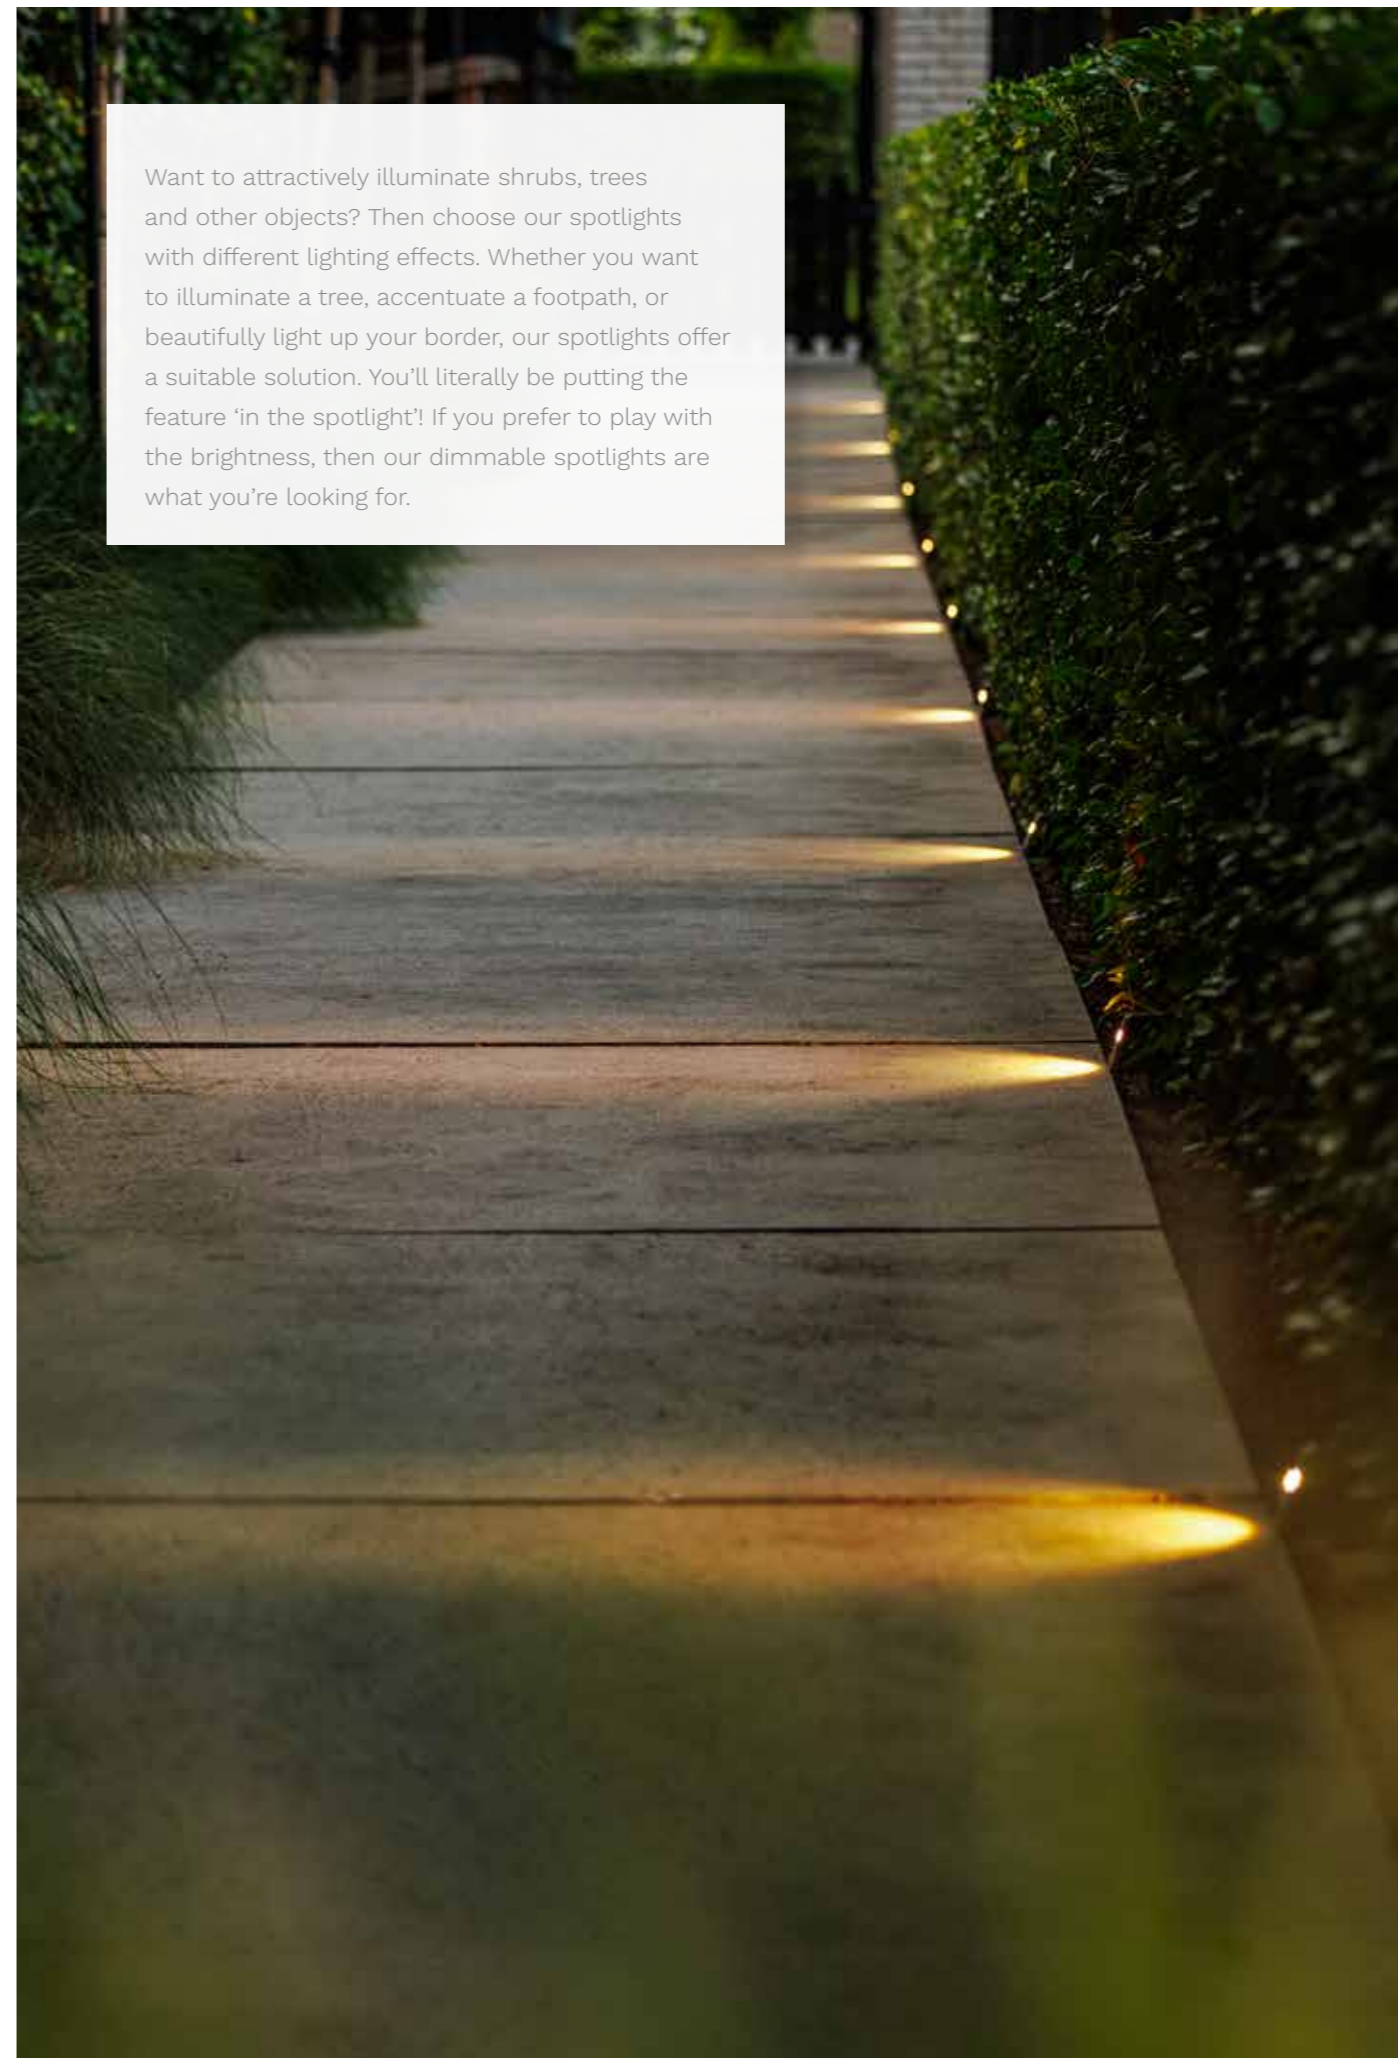



Summer or winter, the Castor is the perfect garden spotlight for illuminating parts of your garden all year round. This spotlight allows you to determine the brightness yourself. Use the handy dimmer to create the mood you really want. The Castor is ideal for putting a tree, shrub, or work of art in the spotlight. The spotlight is made of aluminum and, thanks to its timeless design, fits perfectly in any garden. The high protection class (IP67) provides extra protection against extreme weather conditions!

See also our matching accessories for the Castor on pages 16 and 17.



Multispike

Honeycomb

Anti-glare hood



Castor 4 (178S)

Aluminum - Anthracite
 LED 3.5 W
 3,000 K
 40 - 415 lm
 95 x 60 x 100 mm (H x W x D)



Castor 8 (179S)

Aluminum - Anthracite
 LED 8 W
 3,000 K
 80 - 768 lm
 95 x 60 x 115 mm (H x W x D)



Castor 9 (180S)

Aluminum - Anthracite
 LED 9 W
 3,000 K
 65 - 670 lm
 95 x 60 x 120 mm (H x W x D)



exchangeable reflector

• Each light is supplied with Connector F as standard.



Juno 2 (193S)

Aluminum - Anthracite
LED 1.5 W
3,000 K
160 lm
85 x 55 x 68 mm (H x W x D)



Multispike

See also our matching accessories for the Juno on pages 16 and 17.



Honeycomb

The Tube can be used in combination with the Juno Tube and can either be placed in the ground or mounted on a wall using the accessories supplied.

Tube (215A)

Aluminum - Anthracite
1,200 x 20 mm (H x Ø)



Juno 4 (194S)

Aluminum - Anthracite
LED 4 W
3,000 K
356 lm
85 x 55 x 68 mm (H x W x D)



Juno Tube (213S)

Aluminum - Anthracite
LED 4 W
3,000 K
356 lm
85 x 55 x 68 mm (H x W x D)

• Each light is supplied with Connector F as standard.

Flexible




New



This handy light allows you to beautifully illuminate all the greenery in your garden. The fixture is flexible and therefore easy to bend, enabling you to illuminate features at exactly the right angle. Put the accent on a beautiful statue or lovely shrub! The fixture is easy to move and can also be easily inserted into the ground using the supplied spike. Additionally, the Xible can also be used as a wall light, making it versatile for use in any outdoor space.

Flexible

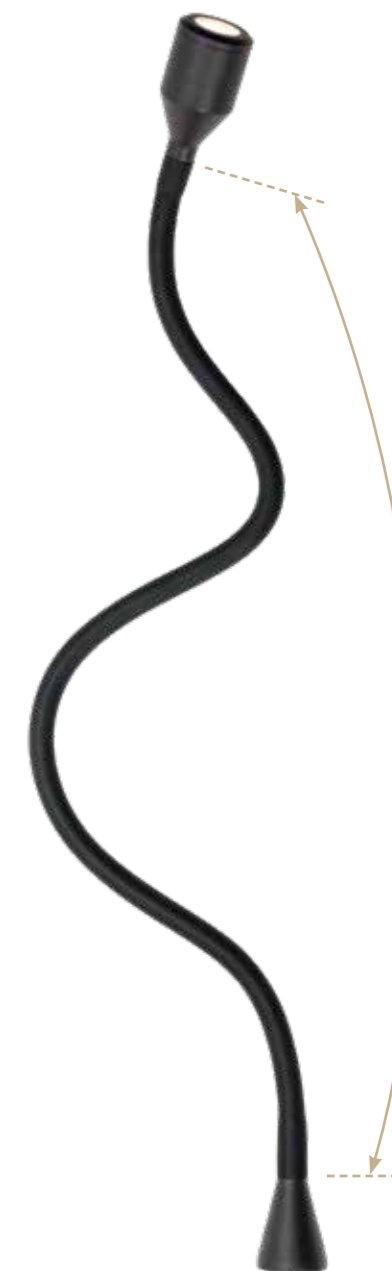

Xible Hi (263S)

Aluminum - Black
 LED 2.1 W
 2,700 K
 187 lm
 900 x 40 x 40 mm (H x W x D)

Xible (224S)

Aluminum - Black
 LED 2 W
 2,700 K
 153 lm
 695 x 36 mm (H x Ø)
 Can also be used as a wall light.

• Each light is supplied with Connector F as standard.

Pond lighting

The Nilus is an underwater spotlight whose design matches that of the Castor and Juno. The protection class of Nilus is IP68. This makes the light suitable for permanent underwater use up to half a meter. The Nilus stays firmly in place in a pond thanks to its weighted base.



Nilus (210S)

ABS - Black
 LED 3.4 W
 3,000 K
 420 lm
 135 x 95 x 110 mm (H x W x D)



Quartz (196W)

Aluminum - Black
 LED 1.8 W
 3,000 K
 137 lm
 105 x 50 x 88 mm (H x W x D)
 Can also be used as a wall light.



A perfect spotlight for illuminating trees and large objects. Illuminates up to 20 meters!

Avior (181S)

Aluminum - Anthracite
 LED 16 W
 3,000 K
 150 - 1,007 lm
 125 x 180 x 68 mm (H x W x D)



• Each light is supplied with Connector F as standard.

Decklights

Onyx 90 RA (245D)

Aluminum - Anthracite

LED 2 W

2,700 K


18 lm

59 x 105 mm (H x Ø)

Drill hole 90 mm



Our extensive range of premium lighting offers the best solution for every garden. Do you want a beautifully lit walkway or a stunning starry path in your garden? Use several Lightpro decklights to create your own dream garden. Simply place them in tiling, decking, or even gravel or soil.

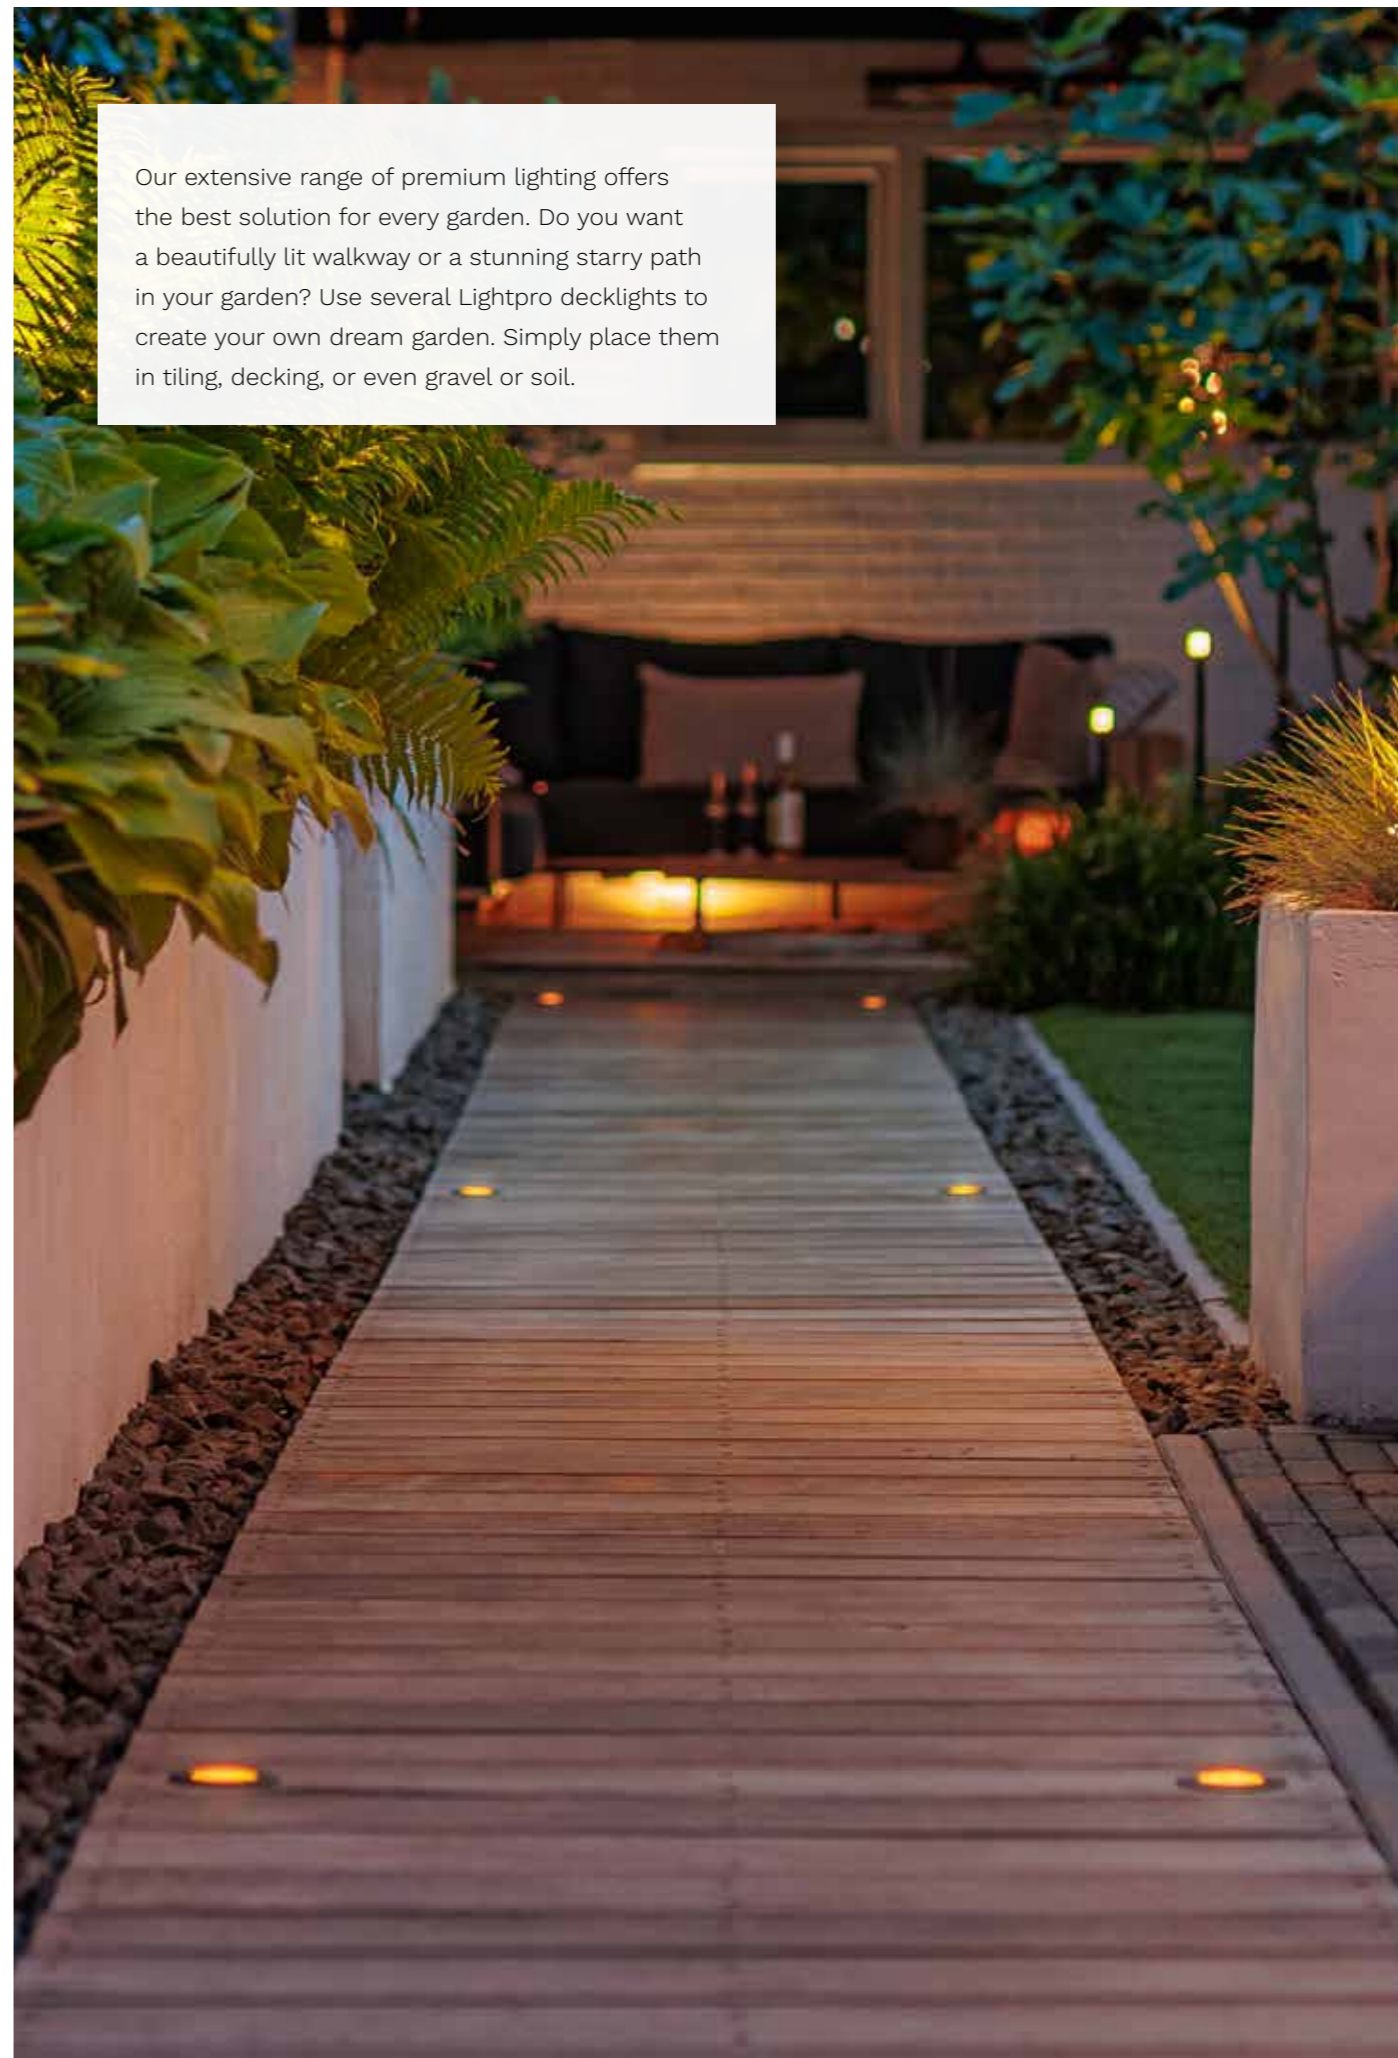

For installing the Onyx 30, 60, or 90 in gravel or soil, we supply a ground tube and three lenses as standard:



Ground tube

Clear

Honeycomb

Matt

**Onyx 30 RS (240D)**

Stainless steel 316
LED 0.5 W
2,700 K
1 lm
59 x 45 mm (H x Ø)
Drill hole 30 mm

**Onyx 30 RA (241D)**

Aluminum - Anthracite
LED 0.5 W
2,700 K
1 lm
59 x 45 mm (H x Ø)
Drill hole 30 mm

**Onyx 60 RS (242D)**

Stainless steel 316
LED 1 W
2,700 K
5 lm
59 x 75 mm (H x Ø)
Drill hole 60 mm

**Onyx 60 RA (243D)**

Aluminum - Anthracite
LED 1 W
2,700 K
5 lm
59 x 75 mm (H x Ø)
Drill hole 60 mm

**Onyx 90 RS (244D)**

Stainless steel 316
LED 2 W
2,700 K
18 lm
59 x 105 mm (H x Ø)
Drill hole 90 mm

**Onyx 90 RA (245D)**

Aluminum - Anthracite
LED 2 W
2,700 K
18 lm
59 x 105 mm (H x Ø)
Drill hole 90 mm

**Onyx 20 Sleeve (237A)**

Aluminum - Black
35 x 31 mm (H x Ø)
Drill hole 25 mm
Combine this Sleeve with the Onyx 20 for a stylish look.

**Onyx 20 (212D)**

Plastic - Black
LED 0.3 W
2,700 K
1 lm
33 x 20 mm (H x Ø)
Drill hole 20 mm

Uplights



Nomia (207U)

Aluminum - Black

LED 3 W

3,000 K


344 lm

125 x 90 mm (H x Ø)


Drill hole 70 mm

Includes ground tube

A tree or shrub properly illuminated makes for a spectacular sight. And this is easy to do yourself by installing uplights. Want to bet you take a peek into your garden more often?

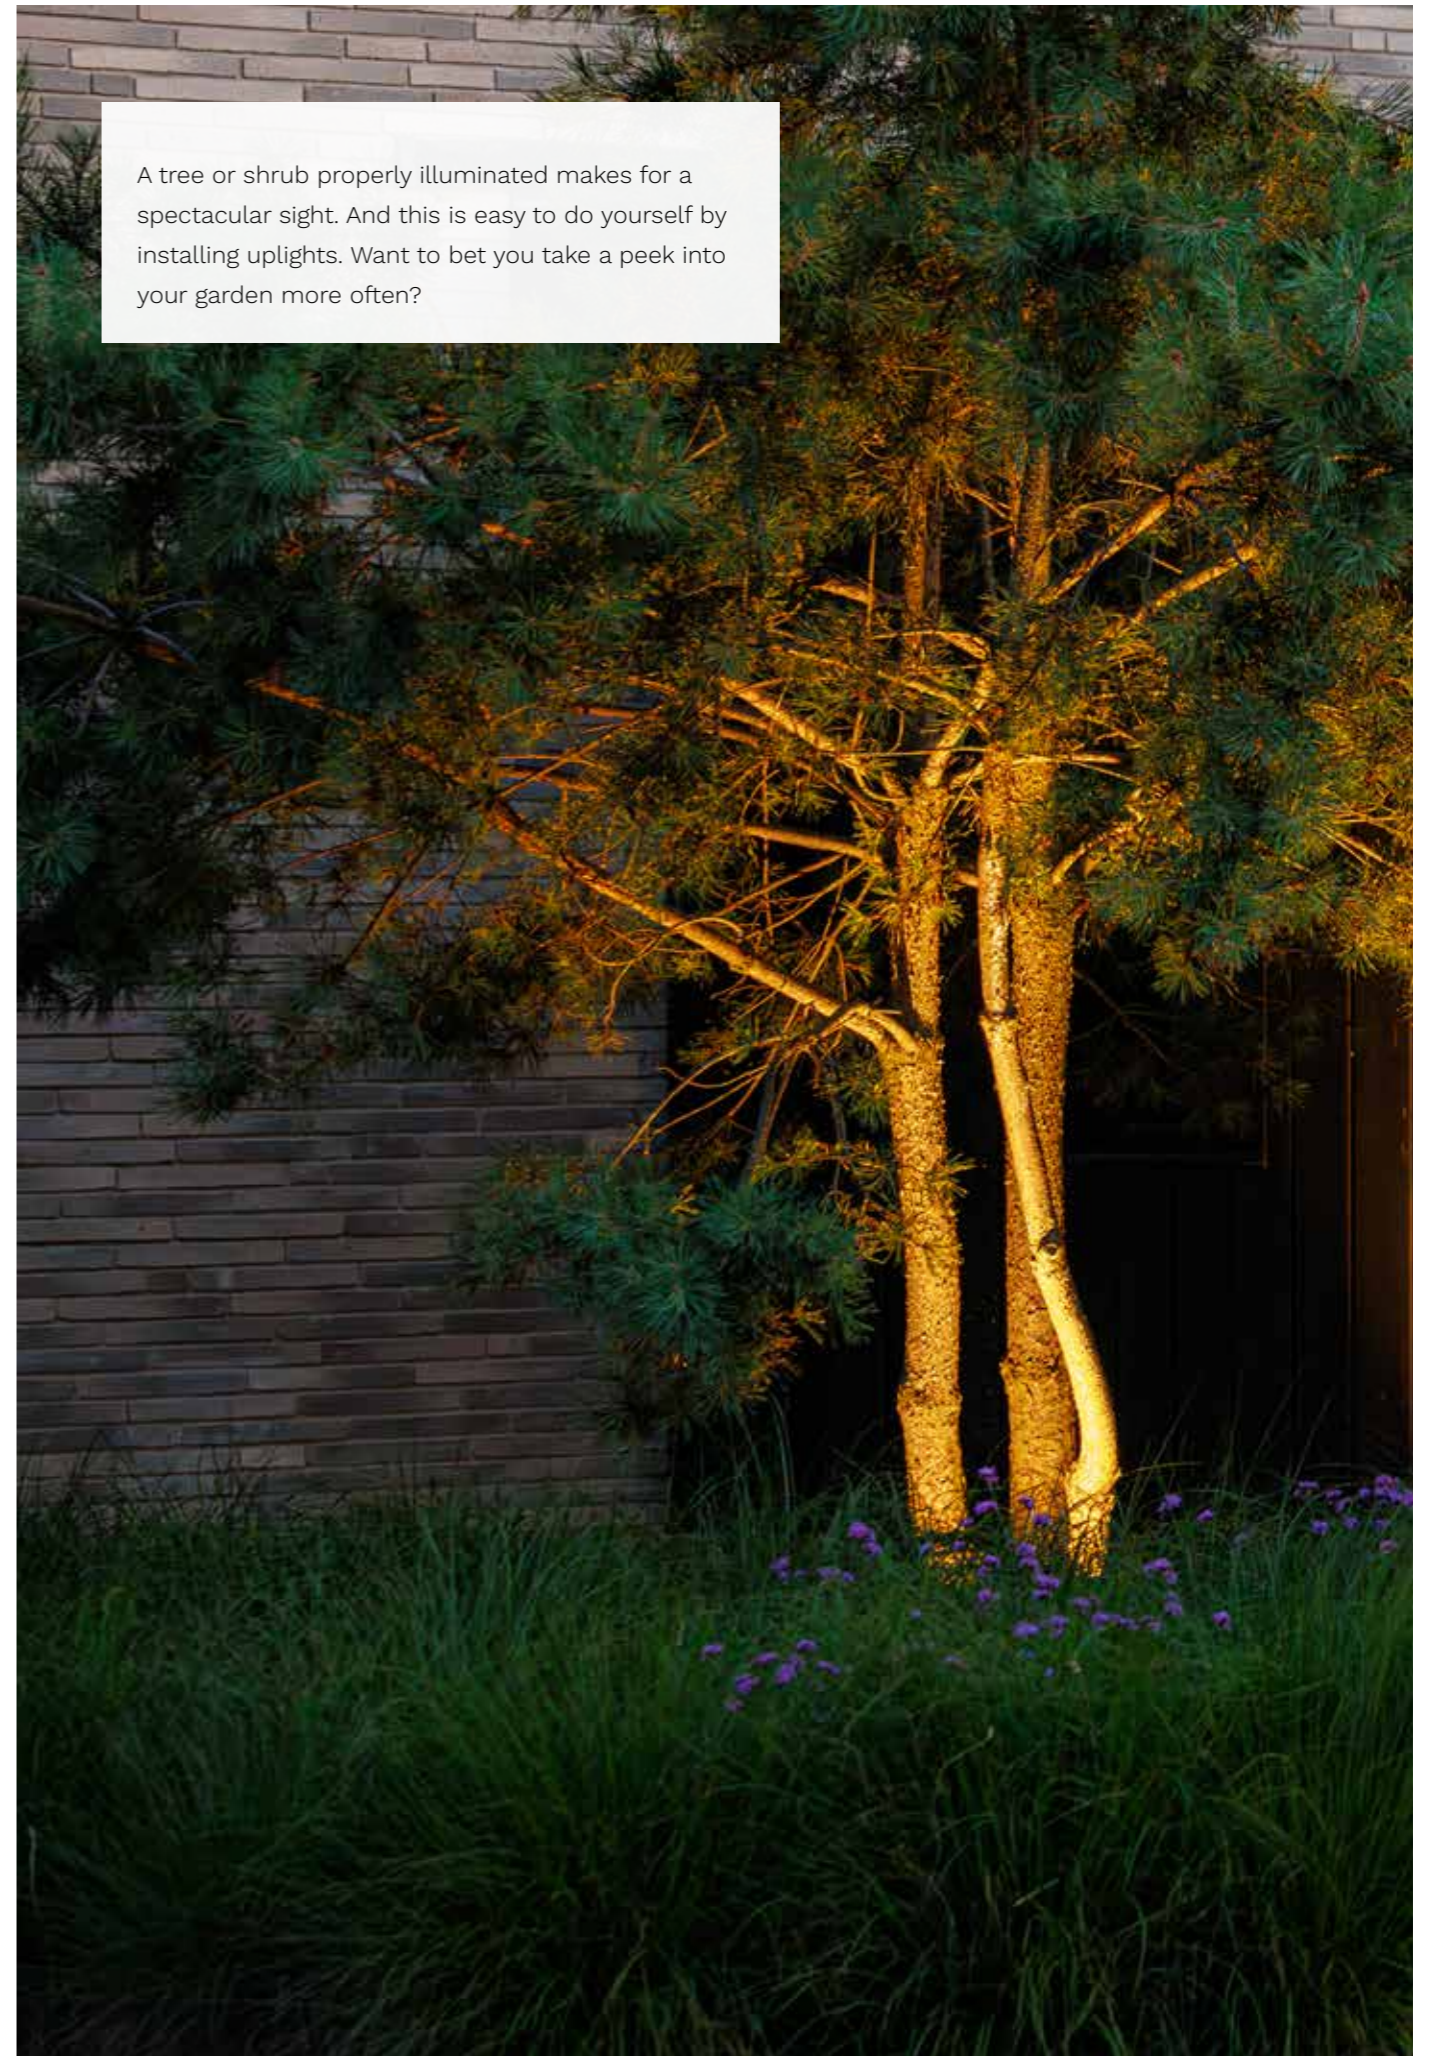

The Atik R1 is a powerful light source for highlighting a tree or object.

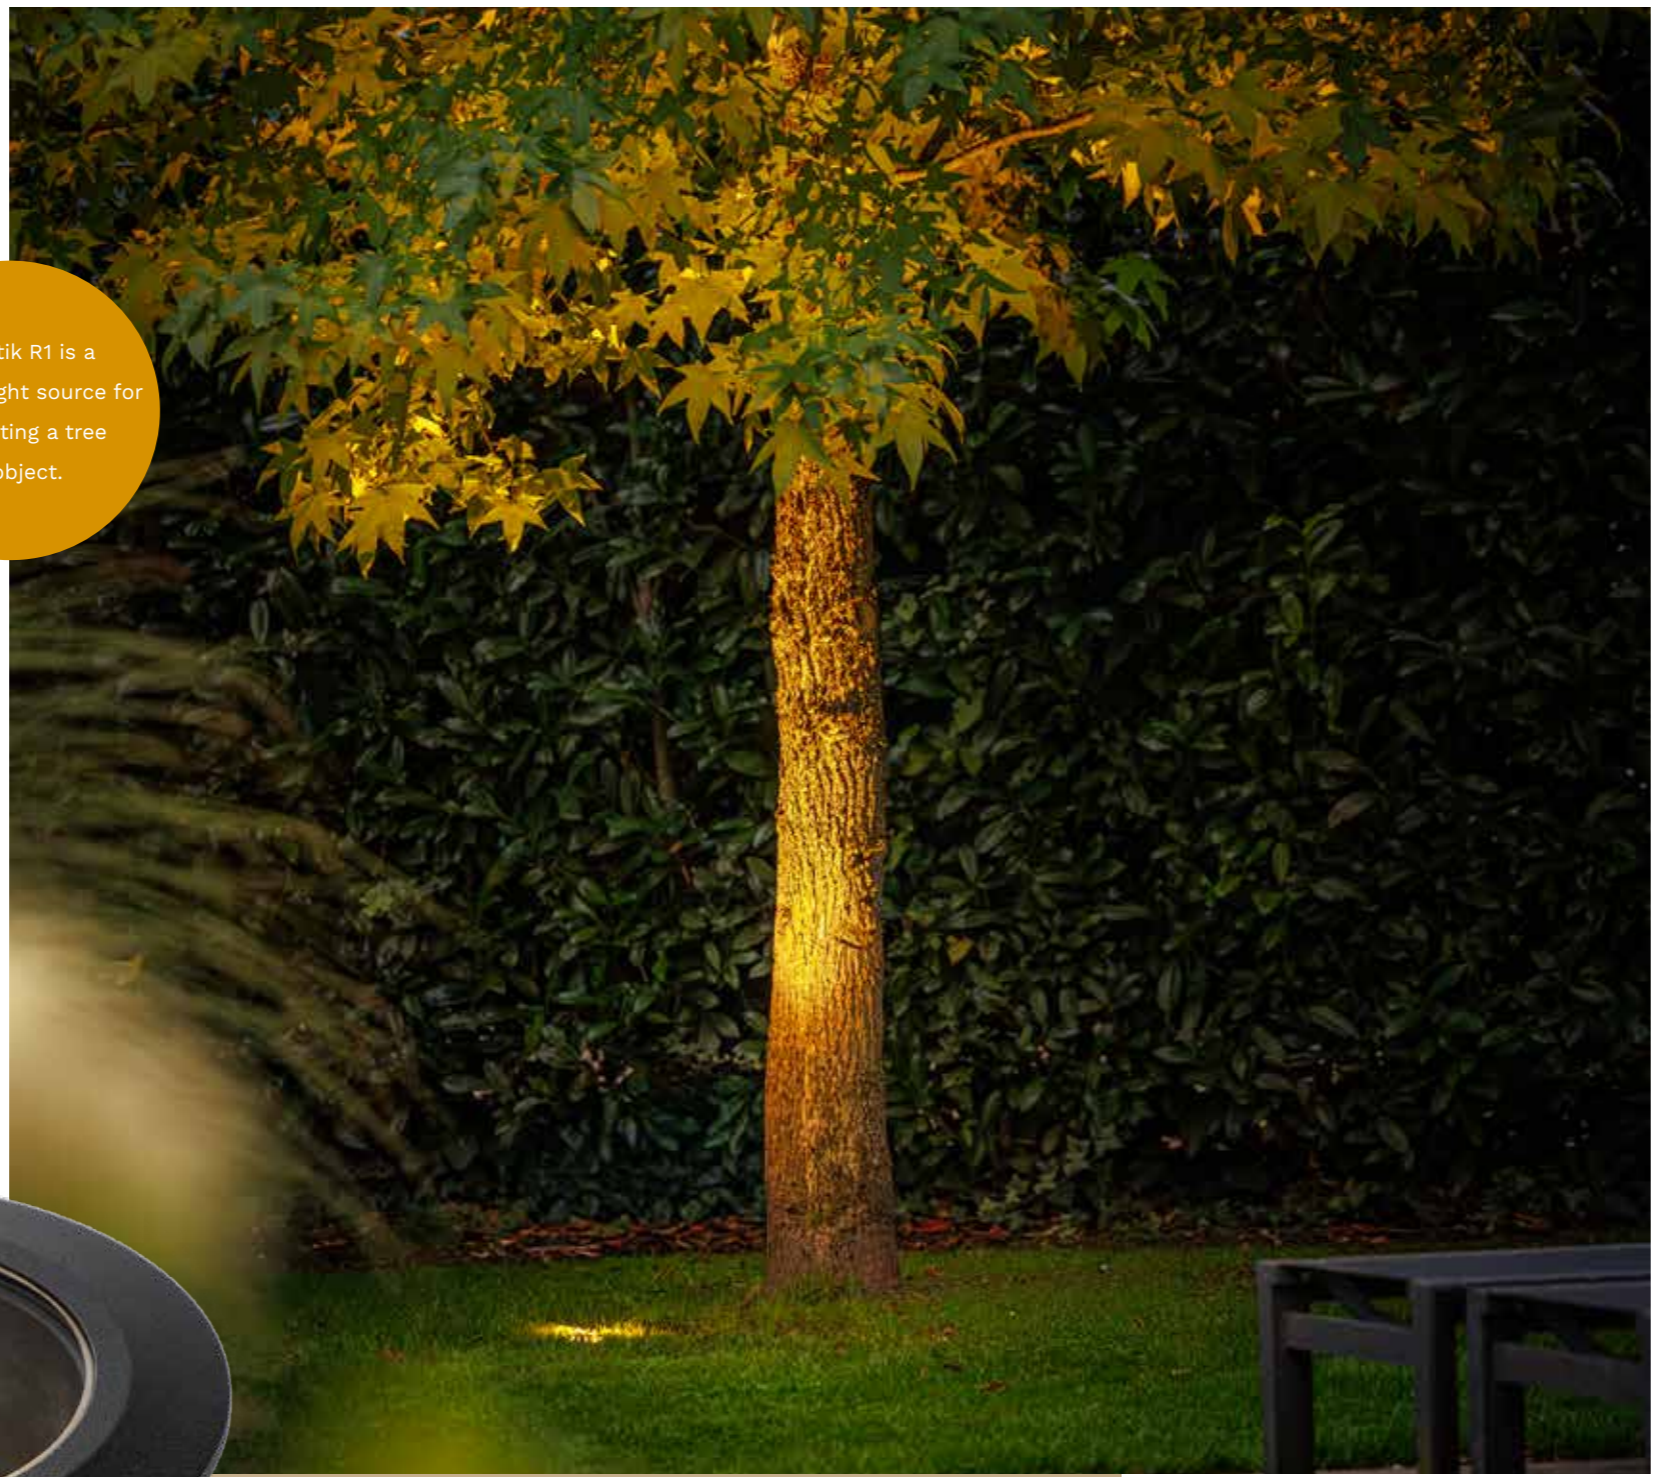

Atik R1 (186U)

Aluminum - Black
LED 9 W
3,000 K
65 - 713 lm
135 x 120 mm (H x Ø)
Drill hole 100 mm
Includes ground tube



DIMMABLE




exchangeable reflector

46



Adjustable light source

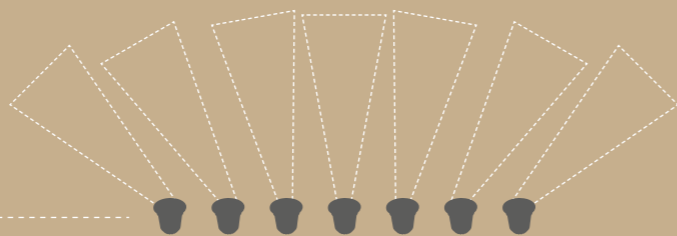

47



Agate (102U)

Stainless steel 316
LED 2.6 W
3,000 K
195 lm
113 x 115 mm (H x Ø)
Drill hole 90 mm
Includes ground tube

• Each light is supplied with Connector F as standard.

Post lights



Oberon DL (192P)


Aluminum - Anthracite

LED 9 W

3,000 K


75 - 288 lm

600 x 93 x 110 mm (H x W x D)



The Oberon DL comes with 3 additional faceplates. With these faceplates the light angle can be adjusted.

Easily create the mood you want in your garden with our post lights, for example along a path or in a border.

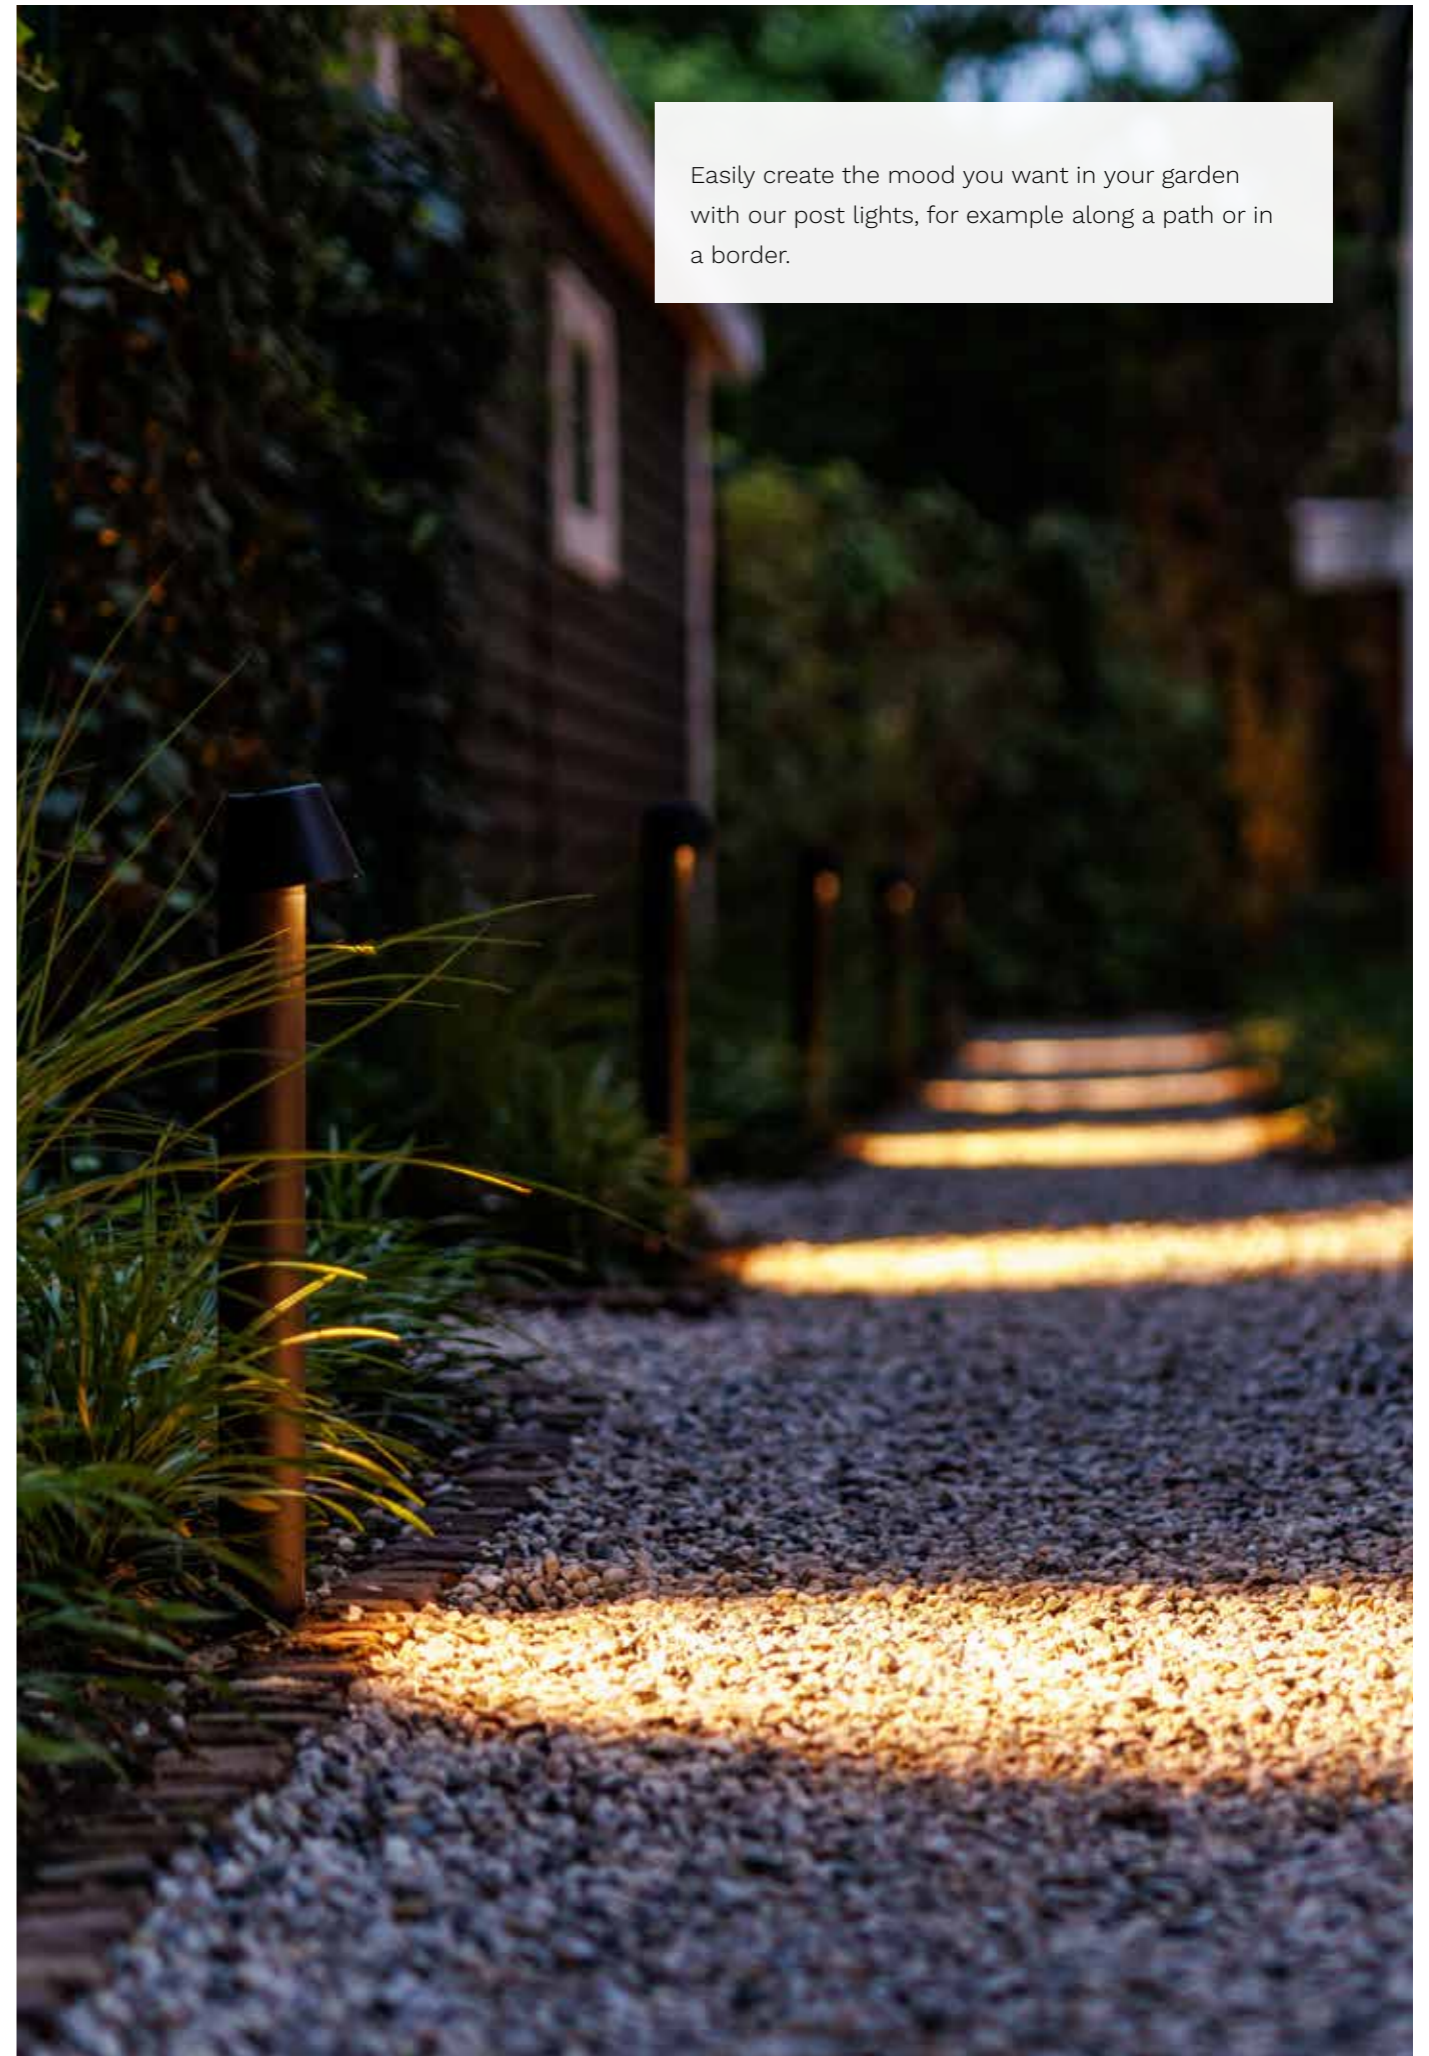



Accentuate your driveway or walkway, or place the fixture next to a bush or plant for a delightful effect.



Erba Mid (223P)

Aluminum - Anthracite
 LED 1.1 W
 3,000 K
 15 lm
 734 x 20 mm (H x Ø)



Erba Set (222P)

Aluminum - Anthracite
 LED 1.1 W (3x)
 3,000 K
 15 lm each

Large	904 x 20 mm (H x Ø)
Medium	734 x 20 mm (H x Ø)
Small	564 x 20 mm (H x Ø)


• Each light is supplied with Connector F as standard.



Oberon Hi (191P)
Aluminum - Anthracite
LED 4 W
3,000 K
40 - 345 lm
665 x 64 mm (H x Ø)



Oberon Lo (190P)
Aluminum - Anthracite
LED 4 W
3,000 K
40 - 345 lm
420 x 64 mm (H x Ø)

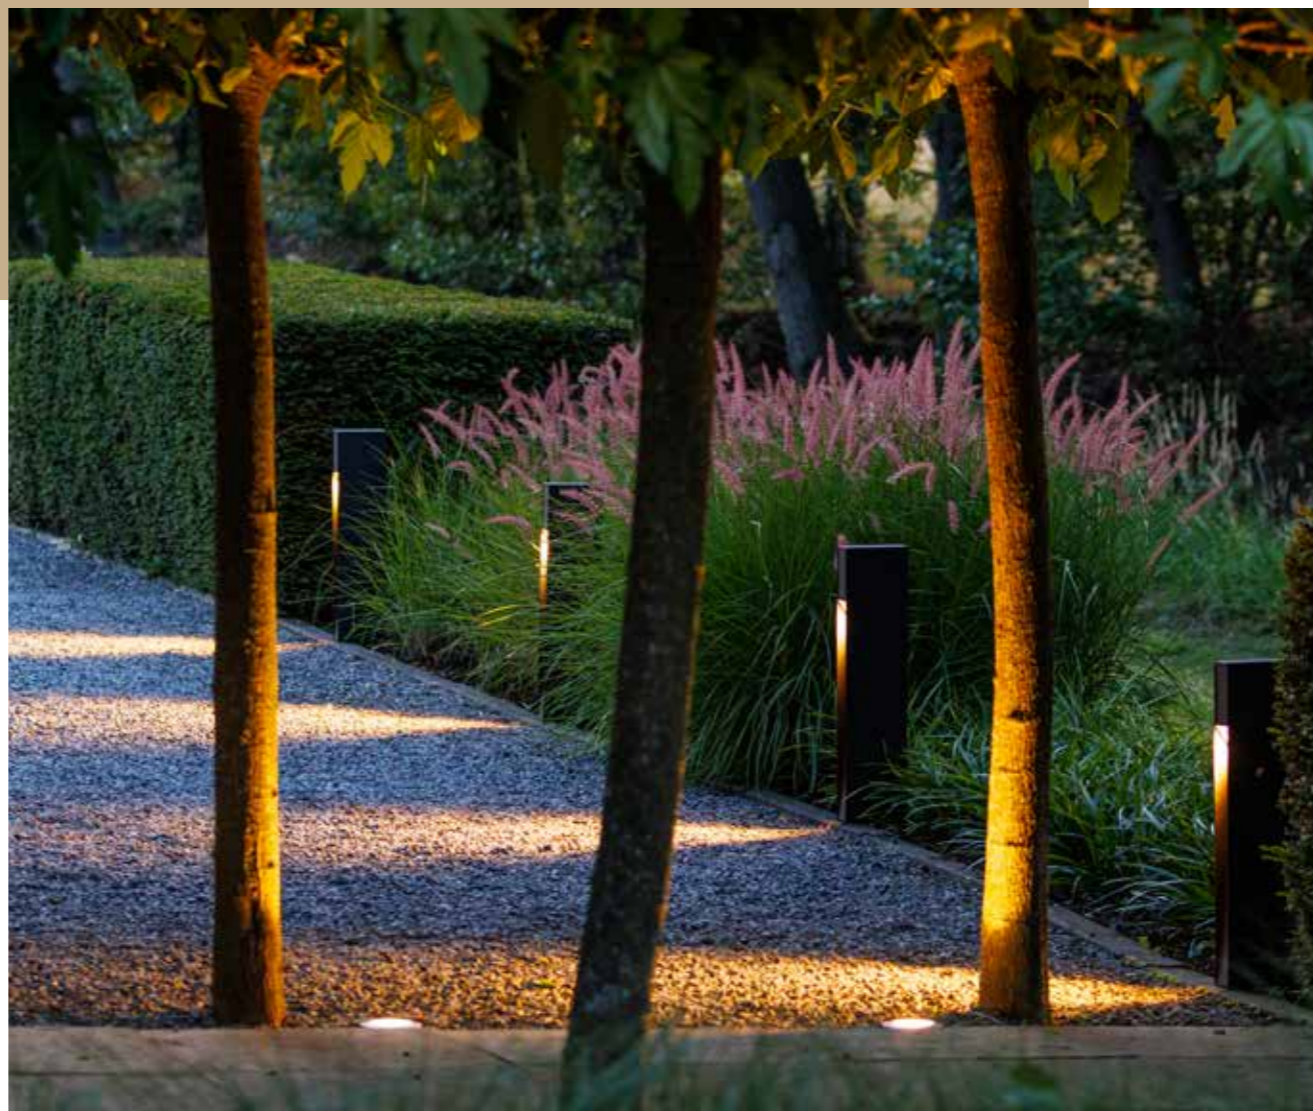


Accentuate
your driveway
or walkway
with Alon.

Alon (221P)
Aluminum - Anthracite
LED 3.3 W
3,000 K
30 - 365 lm
700 x 64 x 160 mm (H x W x D)



• Each light is supplied with Connector F as standard.

New

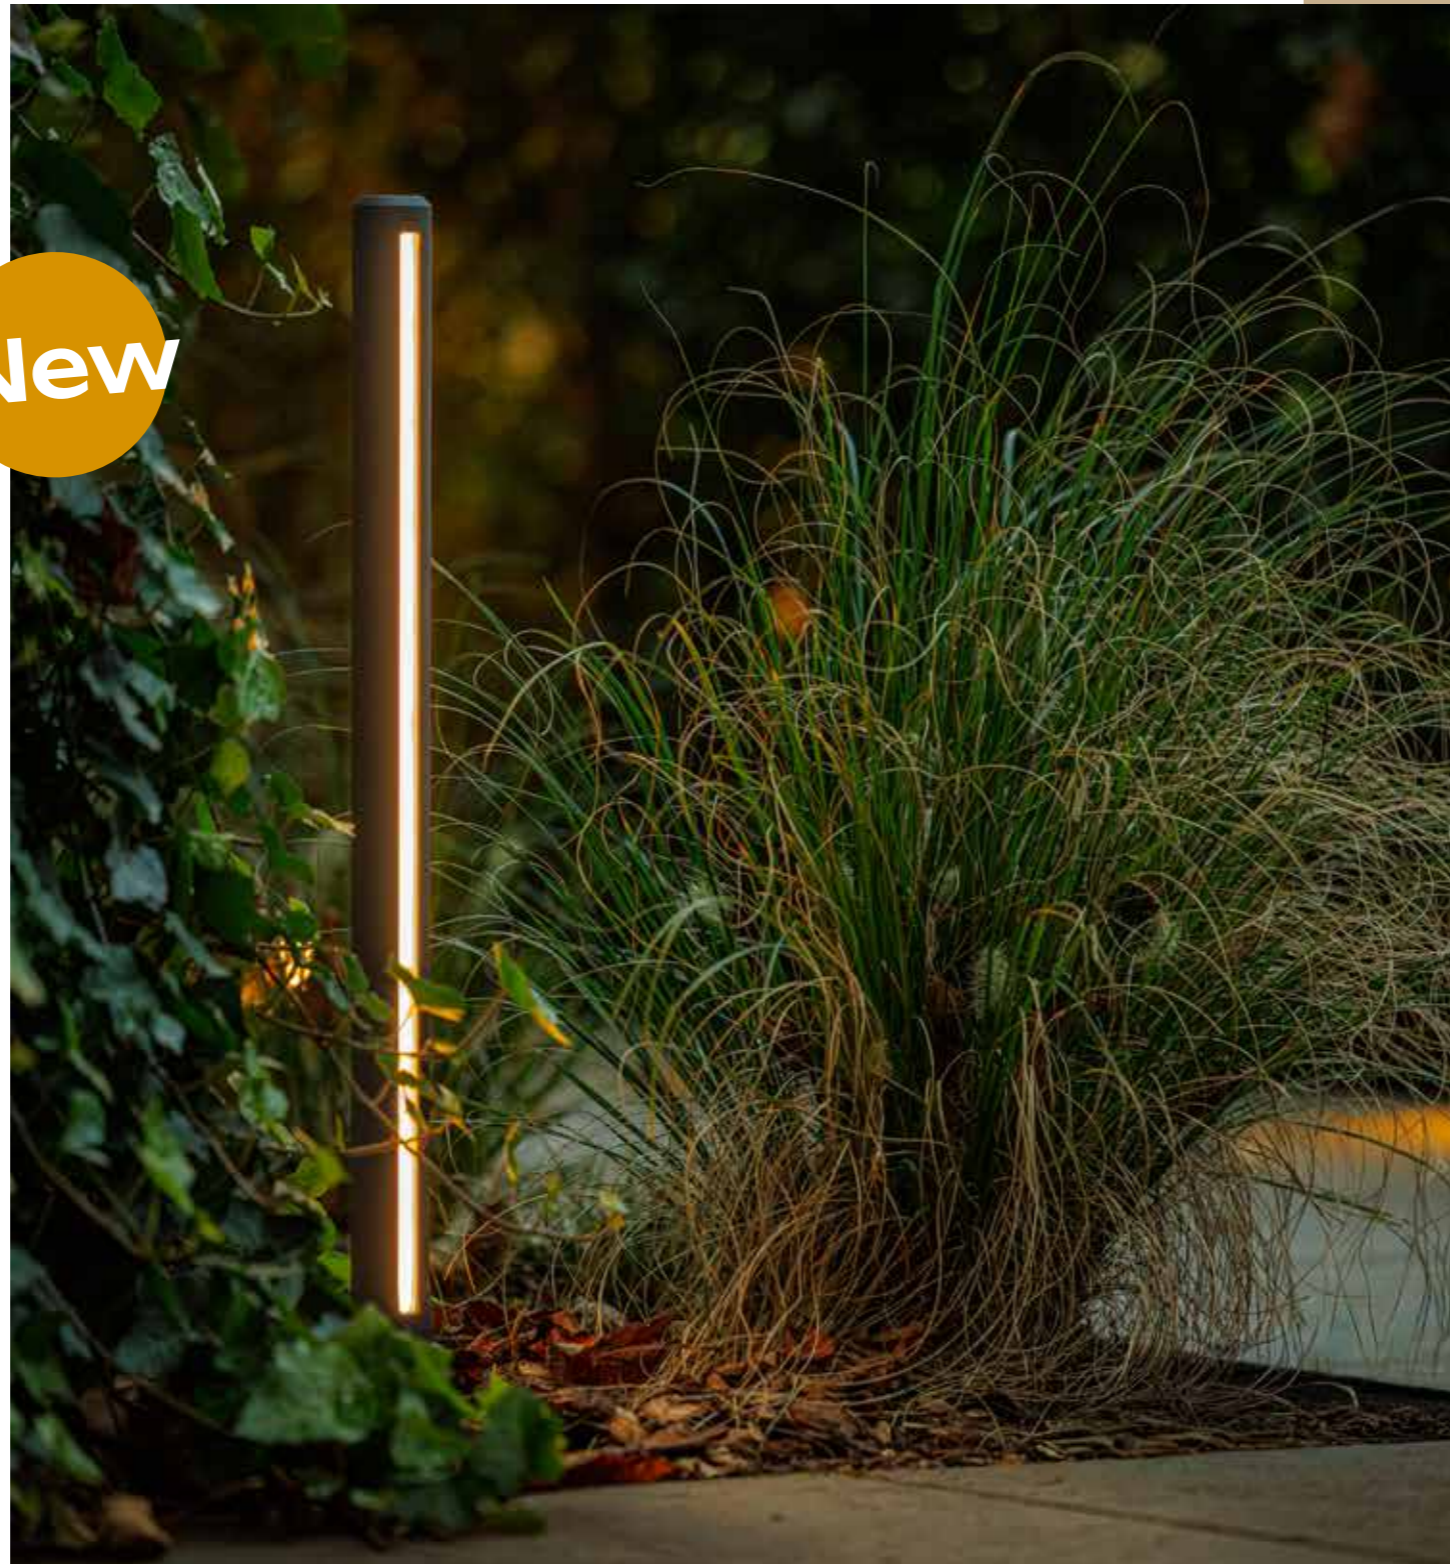

Lino (264P)

Aluminum - Black

LED 6 W

3,000 K

27 - 140 lm

600 x 40 x 40 mm (H x W x D)



Filament



Eros Hi (214P)

Aluminum/glass - Black

LED 3.5 W

2,200 K

277 lm

870 x 115 mm (H x Ø)



Eros Lo (217P)

Aluminum/glass - Black

LED 3.5 W

2,200 K

277 lm

550 x 115 mm (H x Ø)

• Each light is supplied with Connector F as standard.

Wall lights



Tiga Wall (249W)


Aluminum - Black

LED 3.5 W

3,000 K

67 lm

75 x 75 x 42 mm (H x W x D)



The Tiga Wall comes with an additional faceplate. This creates a narrower light angle.

Lighting a fence, garden wall or canopy? This has never been easier than with our wall lights! Simply conceal the cable with the jack plug.






58

This unique dimmable light can be placed at any angle using the bracket provided.



Tiga Corner (208S)

Aluminum - Anthracite
LED 3.5 W
2,700 K
10 - 106 lm
46 x 93 x 105 mm (H x W x D)

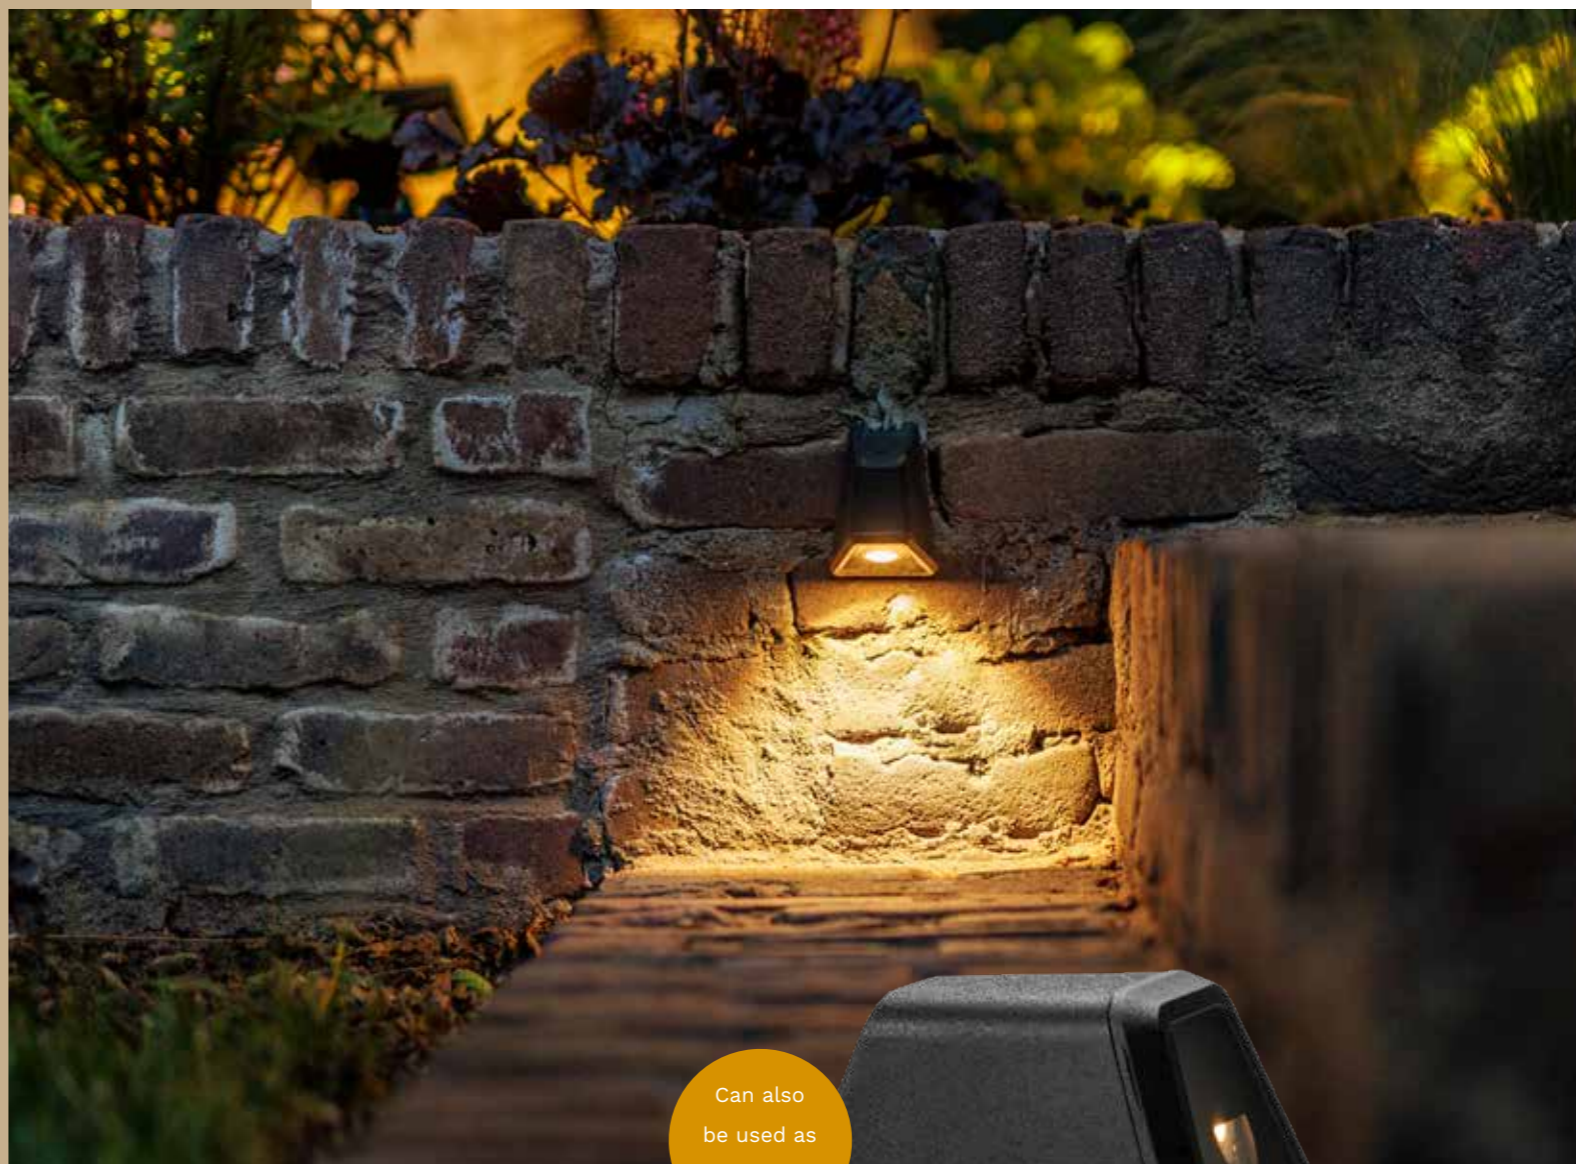

59

Can also be used as spotlight.




Tiga DL (209S)

Aluminum - Black
LED 4.2 W
3,000 K
9 - 85 lm
88 x 68 x 63 mm (H x W x D)



• Each light is supplied with Connector F as standard.

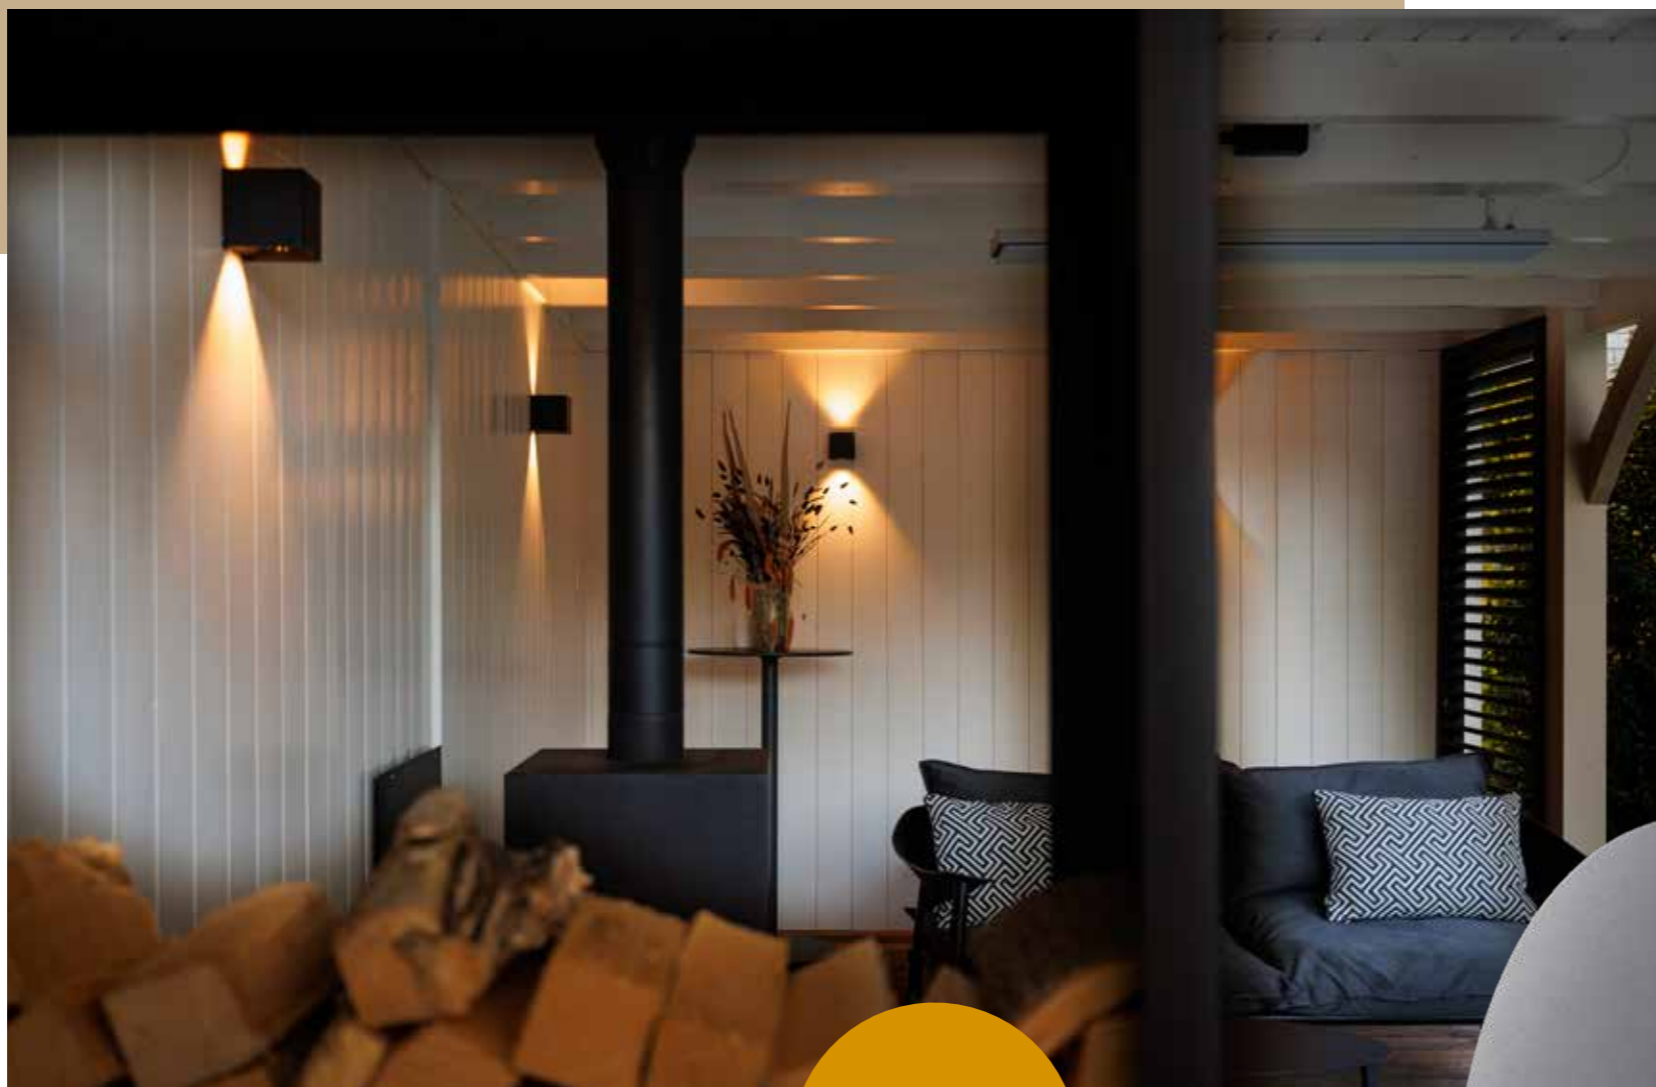


The Kuma has a centered beam. Ideal for lighting a path next to a wall or a border under the fence. The warm white light source also makes the garden a lot more cozy. Wall lighting can be used for multiple purposes. It is both functional and decorative.

Ixion Small can be connected to a 230V power outlet.




Ixion 12V (182W)

Aluminum - Anthracite
 LED 4.5W x2
 3,000 K
 45 - 575 lm
 110 x 110 x 110 mm (H x W x D)



Ixion Small 230V (230W)

Aluminum - Anthracite
 LED 3W x2
 3,000 K
 482 lm
 100 x 100 x 100 mm (H x W x D)



Kuma (184W)

Aluminum - Black
 LED 6 W
 3,000 K
 105 lm
 145 x 35 mm (Ø x D)

• Each light is supplied with Connector F as standard.



The Tube can be used in combination with the Juno Tube and can either be placed in the ground or mounted on a wall using the accessories supplied.

Tube (215A)

Aluminum - Anthracite
1,200 x 20 mm (H x Ø)

Can also be used as a spotlight.



Quartz (196W)

Aluminum - Black
LED 1.8 W
3,000 K
137 lm
105 x 50 x 88 mm (H x W x D)



Juno Tube (213S)

Aluminum - Anthracite
LED 4 W
3,000 K
356 lm
85 x 55 x 68 mm (H x W x D)





Atik Smart (Zigbee) (246N)

Aluminum - Black

LED 5 W

211 lm

135 x 120 mm (H x Ø)

Drill hole 100 mm

Includes ground tube

Gateway required



New

**Senso Smart (Zigbee) (265N)**

Aluminum - Black
 LED 7 W
 640 lm
 39 x 162 x 31 mm (H x W x D)
 Gateway required

Deco 30 Smart (Zigbee) (254N)

Polyethylene - White
 LED 5 W
 254 lm
 300 mm (Ø)
 Gateway required

Deco 40 Smart (Zigbee) (255N)

Polyethylene - White
 LED 5 W
 242 lm
 400 mm (Ø)
 Gateway required

Deco 50 Smart (Zigbee) (256N)

Polyethylene - White
 LED 5 W
 220 lm
 500 mm (Ø)
 Gateway required

With groundspike and feet, easy to place on any surface.

**Oberon Smart (Zigbee) (199N)**

Aluminum - Anthracite
 LED 5 W
 212 lm
 665 x 64 mm (H x Ø)
 Gateway required

**Castor Smart (Zigbee) (200N)**

Aluminum - Anthracite
 LED 5 W
 207 lm
 95 x 60 x 120 mm (H x W x D)
 Gateway required





Use Gateway Smart to connect to the Lightpro Zigbee smart lights and the Zigbee Motion Sensor Smart. The Gateway Smart has to be added first before connecting other products. Please note: the Gateway Smart must be placed indoors, and permanently connected to a 230V power outlet using the adapter supplied.

Gateway Smart (Wi-Fi - Zigbee) (219A)

Plastic - Black
Range 20 meters (open field)
IP20
64 x 64 x 15 mm (H x W x D)

Smart



Camera Smart 12V (Wi-Fi) (218A)

Plastic - Black
71 x 66 x 188 mm (H x W x D)
IP65
Use 7 watt

- 2 megapixels camera for outdoor use
- 15 frames per second
- Cloud data storage (subscription)
- Local storage on micro SD card max. 128 GB
- Night vision (infrared)
- Combines motion with smart outdoor lighting
- Includes PIR motion sensor
- Detects motion up to 10m
- Detection angle 65 degrees
- Adjustable sensitivity
- Max. 40 meters from the router

Our 12-volt Camera Smart works on Wi-Fi and is easily connected to our 12V system. Review footage via the app or talk to the person at your front door via our Camera Smart! Everything is easy to operate via the Lightpro app. Mount it on the wall, fence, or your garden shed. Placement in the middle of the garden? Use the Multispikes and Camera mounting kit.

68



Motion Sensor Smart (Zigbee) (227A)

Plastic - Black
Detection range up to 10 meters
Detection angle 120 degrees
Incl. 2 AAA batteries
70 x 70 x 32 mm (H x W x D)

Repel uninvited guests and ensure safety in your garden. The wireless Motion Sensor Smart operates using Zigbee. The advantage of Zigbee is that the products communicate with each other, giving you endless range. For optimal performance and detection, we recommend placing the Motion Sensor Smart at a minimum height of 80 cm. The Motion Sensor Smart is easy to install using the included magnetic wall mount.



Switch Smart (Wi-Fi) (238A)

Plastic - Black
Range 40 meters
IP44
75 x 70 x 30 mm (H x W x D)
Includes ground spike and wall mounting hardware.

Use the Switch Smart to easily control non-Smart lighting with the Lightpro app. The Switch Smart works on Wi-Fi and is connected in no time.




Need more information?
Visit our Smart page.

69

The 12-volt system of Lightpro

Our garden lighting offers endless possibilities for illuminating your outdoor space in an attractive and functional way. As a professional brand, we supply high-quality 12-volt solutions that are safe, flexible, and waterproof. Burying cables? Not necessary. By using branches, distances of up to 80 meters can be achieved. Our unique, one-piece connector allows you to connect fixtures quickly and reliably—without any hassle. Whether you have a small garden or a large project, our system will help you turn any garden into a stunning showcase.

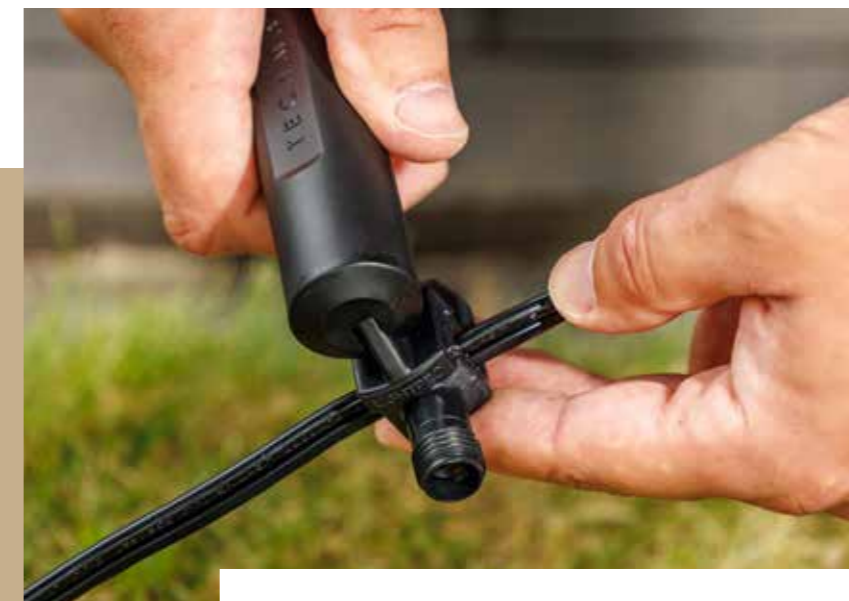


Connector tool (232A)

Effortlessly tighten Connector F and Connector M. Use our handy Connector tool to connect your lights even faster. Available free of charge from your dealer—please inquire!

Branch

You can create one or more branches from the transformer. For this, you'll need both an additional Connector F and a Connector M.

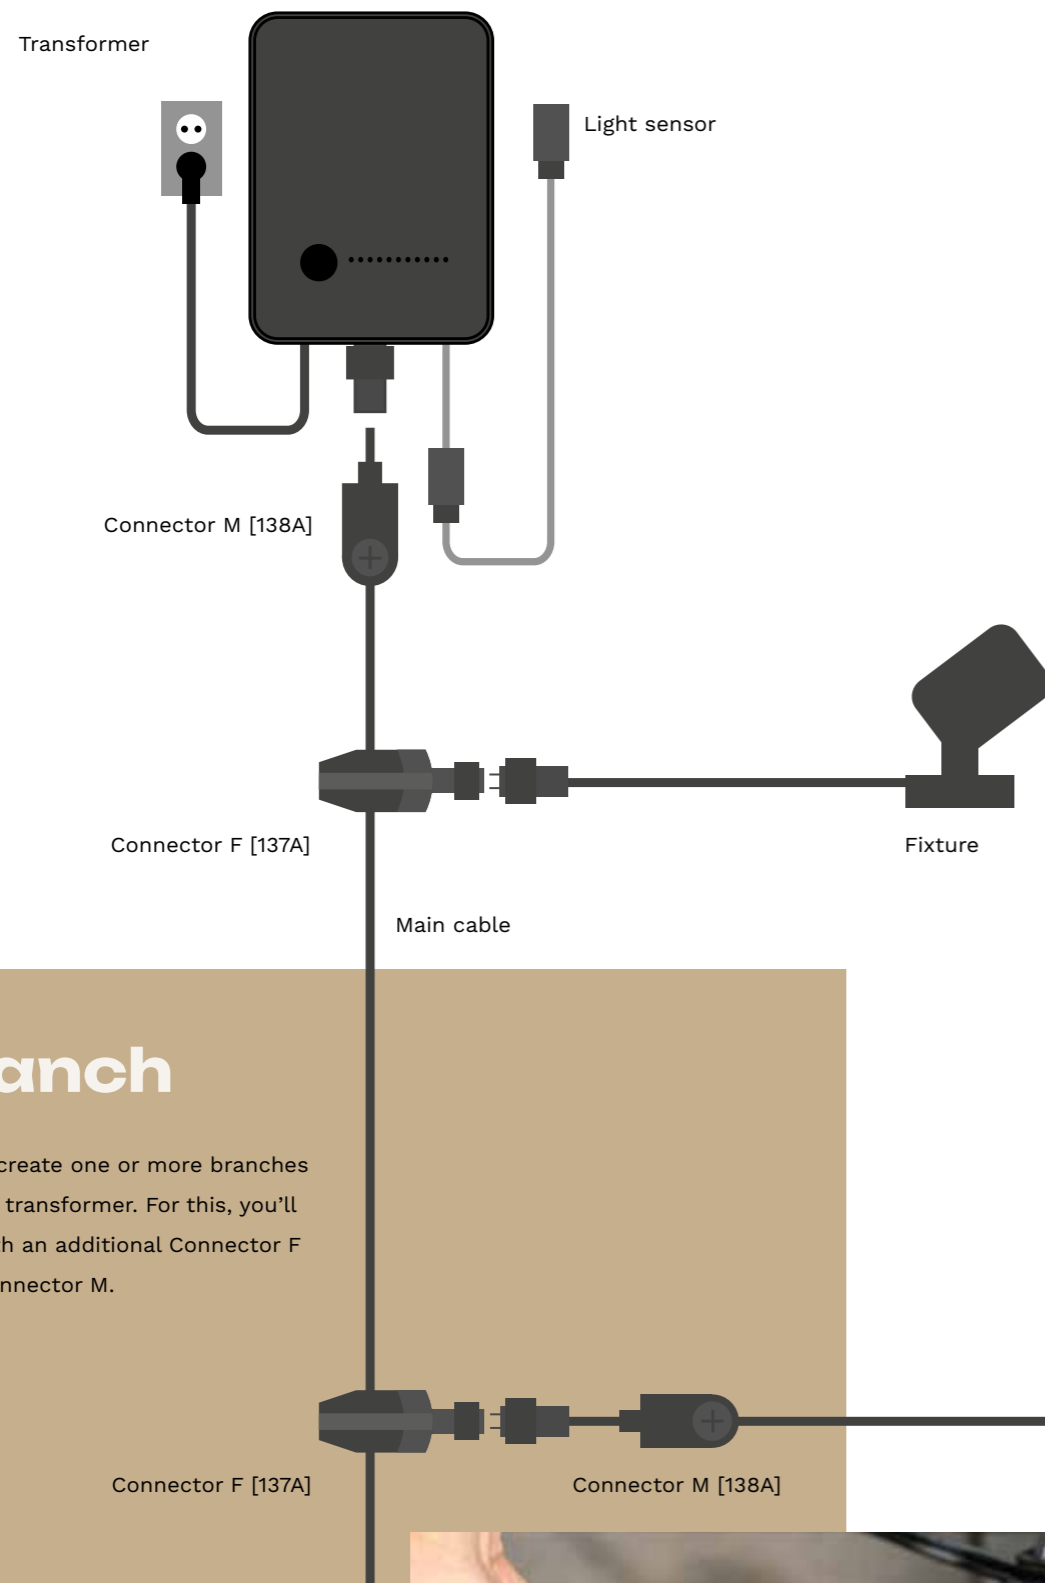

Installation

- 1 Position the lights**
Place the lights in the desired locations in the garden.
- 2 Unroll the main cable**
Lay the cable along the lights without digging.
- 3 Connect the lights to the main cable**
Screw Connector F (supplied as standard with every light) onto the main cable and connect the light.
- 4 Connect the cable to the transformer**
Use Connector M at the beginning of the cable and plug it into the transformer.
- 5 Plug it into the wall socket**
Done! The lighting works immediately.



For more information, visit our YouTube channel.

Accessories



New

Honeycomb Juno (251A)

Aluminum/plastic - Black

33 x 50 x 50 mm (H x W x D)

Easy to attach to the Juno 2, 4, and Juno Tube.



New

Honeycomb Castor (252A)

Aluminum/plastic - Black

39 x 64 x 64 mm (H x W x D)

Easy to attach to the Castor 4, 8, and 9.





Transformers

Transformer Touch 100 W

Plastic - Black
 100 Watt
 185 x 123 x 77 mm (H x W x D)
 Includes light sensor, Connector M and timer function (10 settings).

EU Plug (225A)

BS Plug (228A)

Transformer Touch 150 W

Plastic - Black
 150 Watt
 185 x 123 x 77 mm (H x W x D)
 Includes light sensor, Connector M and timer function (10 settings).

EU Plug (226A)

BS Plug (229A)

This transformer is suitable for 12-volt lights or accessories and can be connected to a maximum of 24 watts of lights or accessories. The 24W Transformer is splash-proof and ideal for outdoor use.



Transformer 24 W (198A)

Plastic - Black
 24 Watt
 78 x 47 x 78 mm (H x W x D)
 Connector M (138A) required

EU Plug

Accessories for the Transformer



Light-sensor extension cable (162A)

Plastic - Black
 6 meter



Transformer Touch Cover (231A)

Plastic
 195 x 135 x 77 mm (H x W x D)

Cables



Cable 25m (025C14)

Plastic - Black
 14AWG
 25 meter
 Including end caps

Extension cable 0.3m (1381011)

Plastic - Black
 SPT-2W
 0.3 meter
 For accessories such as a Switch and Receiver

Cable 50m (050C14)

Plastic - Black
 14AWG
 50 meter
 Including end caps

Extension cable 1m (146A)

Plastic - Black
 SPT-2W
 1 meter

Cable 100m (100C14)

Plastic - Black
 14AWG
 100 meter
 Including end caps

Extension cable 3m (147A)

Plastic - Black
 SPT-2W
 3 meter

Cable 200m (200C14)

Plastic - Black
 14AWG
 200 meter
 Including end caps





Connectors



Cable splitter (216A)

Plastic - Black

40 x 60 x 20 mm (H x W x D)

Make 3 branches at once.

Wireless operation



Connector F (137A)

Plastic - Black

Type F (Female)

45 x 23 x 60 mm (H x W x D)



Connector Cover (247A)

Plastic

IP68, 5 pieces, Including gel

120 x 47 x 55 mm (H x W x D)

Severe weather conditions? Use this handy tool to make Connector F IP68.




Connector M (138A)

Plastic - Black

Type M (Male)

40 x 27 x 60 mm (H x W x D)

For the transformer (198A) or for creating a branch connection.

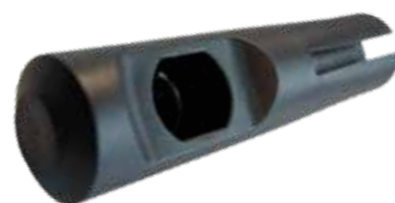

Connector tool (232A)

Would you like to tighten Connector F and Connector M onto the cable even more easily? Then use our free Connector tool.

Remote control + receiver (166A)

Plastic - Black

75 x 70 x 38 mm (H x W x D)

Range 40 meters (open field)

Operates on radio frequency

Use the remote control to switch your outdoor lighting on or off from a distance.

Connect up to 9 receivers to one remote control.

Batteries included

Receiver (167A)

Plastic - Black

70 x 70 x 35 mm (H x W x D)

Range 40 meters (open field)

Operates on radio frequency

For adding additional groups to your remote control + receiver.





Camera mounting kit (257A)

Aluminum - Black
 33 x 50 x 50 mm (H x W x D)
 Required for attaching the Camera Smart to the Multispike.

New

Multispike (253A)

Aluminum - Black
 390 x 30 x 30 mm (H x W x D)
 For placing Castor, Juno, or Camera Smart in a higher position. Height adjustable from 40 to 60 cm.

New



New



Anti-glare hood (258A)

Aluminum - Anthracite
 110 x 64 x 64 mm (H x W x D)
 For the Castor 4, 8 and 9.



Onyx 20 Sleeve (237A)

Aluminum - Black
 35 x 31 mm (H x Ø)
 Drill hole 25 mm
 Combine this Sleeve with the Onyx 20 for a stylish look.


Extra stability

Groundspike (21363011)

Metal
 310 x 185 x 185 mm (H x W x D)
 Use for the Eros Lo and Eros Hi.



For the LED strip

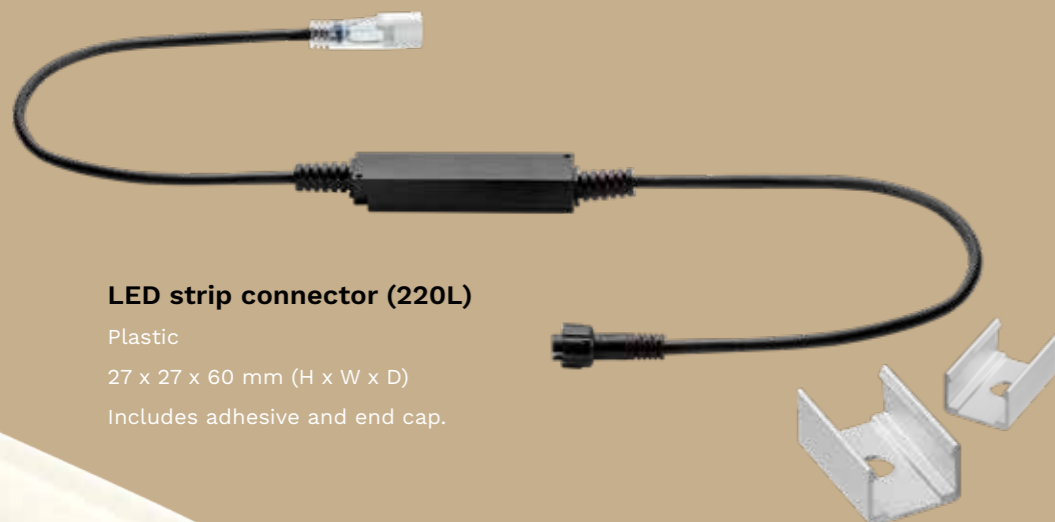

LED strip connector (220L)

Plastic
 27 x 27 x 60 mm (H x W x D)
 Includes adhesive and end cap.

LED strip clips (250L)

Aluminum
 60 pieces
 9 x 11 x 17 mm (H x W x D)
 Screws and plugs included.

Tube (215A)

Aluminum - Anthracite
 1,200 x 20 mm (H x Ø)





Technical information




Decorative lights	84
Spotlights	86
Decklights	92
Uplights	96
Post lights	98
Wall lights	102
Smart	104

Decorative lights

Deco 30 Smart

Article number 254N | EAN code 8719979284572 | Warranty 6 years


Product		Light source		Accessories/contents supplied
Material	Polyethylene	Type	SMD LED (MR16)	Mounting material
Color	White	Replaceable	Yes	Connector F
Cable	1.5 m H05RN-F	Voltage	12 V AC/DC	Base
Length	300 mm	Start-up voltage	9V	Plug
Width	300 mm	Wattage	5 W	
Height	300 mm	Net luminous flux	254 lm	
		Light color (CCT)	RGB	Light beam/-effect
IP class	IP44	Light angle	All-round	
Protection class	III	Average lifetime	25,000 hours	
		CRI	-	
Smart	Yes, Zigbee	Switching on/off	10,000	
Required	Gateway	Dimmable	Yes (app)	
		Energy class	G	



Deco 40 Smart

Article number 255N | EAN code 8719979284589 | Warranty 6 years


Product		Light source		Accessories/contents supplied
Material	Polyethylene	Type	SMD LED (MR16)	Mounting material
Color	White	Replaceable	Yes	Connector F
Cable	1.5 m H05RN-F	Voltage	12 V AC/DC	Base
Length	400 mm	Start-up voltage	9V	Plug
Width	400 mm	Wattage	5 W	
Height	400 mm	Net luminous flux	242 lm	
		Light color (CCT)	RGB	Light beam/-effect
IP class	IP44	Light angle	All-round	
Protection class	III	Average lifetime	25,000 hours	
		CRI	-	
Smart	Yes, Zigbee	Switching on/off	10,000	
Required	Gateway	Dimmable	Yes (app)	
		Energy class	G	



Deco 50 Smart

Article number 256N | EAN code 8719979284596 | Warranty 6 years


Product		Light source		Accessories/contents supplied
Material	Polyethylene	Type	SMD LED (MR16)	Mounting material
Color	White	Replaceable	Yes	Connector F
Cable	1.5 m H05RN-F	Voltage	12 V AC/DC	Base
Length	500 mm	Start-up voltage	9V	Plug
Width	500 mm	Wattage	5 W	
Height	500 mm	Net luminous flux	220 lm	
		Light color (CCT)	RGB	Light beam/-effect
IP class	IP44	Light angle	All-round	
Protection class	III	Average lifetime	25,000 hours	
		CRI	-	
Smart	Yes, Zigbee	Switching on/off	10,000	
Required	Gateway	Dimmable	Yes (app)	
		Energy class	G	



LED strip

Article number 175L | EAN code 5907800859850 | Warranty 6 years


Product		Light source		Accessories/contents supplied
Material	Plastic	Type	SMD LED	
Color	White	Replaceable	No	
Cable	-	Voltage	12 V AC/DC	
Length	15 m	Start-up voltage	9V	
Width	10 mm	Wattage	2.2 Watt per meter	
Height	15 mm	Net luminous flux	90 lm / m	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect
IP class	IP67	Light angle	180°	
Protection class	III	Average lifetime	25,000 hours	
Required	LED strip connector	CRI	81	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	G	



Rodas

Article number 239R | EAN code 8719979284169 | Warranty 6 years


Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Connector F
Color	Black	Replaceable	No	
Cable	3 m	Voltage	12 V AC/DC	
		Start-up voltage	9V	
Diameter	20 mm	Wattage	1.1 W (3x)	
Height	100 mm	Net luminous flux	15 lm each	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect
IP class	IP65	Light angle	-	
Protection class	III	Average lifetime	25,000 hours	
		CRI	80	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	F	



Spotlights


Xible

Article number 224S | EAN code 8719979283667 | Warranty 6 years

Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED (MR8)	Connector F
Color	Black	Replaceable	No	Groundspike
Cable	1.15 m SPT-1W	Voltage	12 V AC/DC	Wall mounting
Depth		Start-up voltage	9V	
Diameter	36 mm	Wattage	2 W	
Height	695 mm	Net luminous flux	153 lm	
Drill hole	-	Light color (CCT)	2,700 K	Light beam/-effect
IP class	IP44	Light angle	30°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	84	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	F	


Xible Hi

Article number 263S | EAN code 8719979285043 | Warranty 6 years

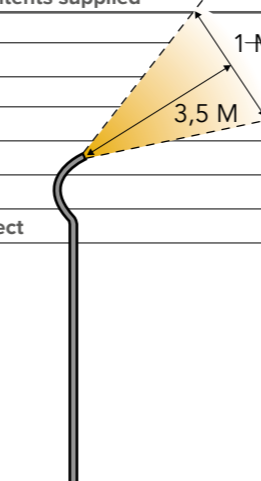Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Connector F
Color	Black	Replaceable	No	Groundspike
Cable	1.5 m H05RN-F	Voltage	12 V AC/DC	
Depth		Start-up voltage	9V	
Diameter	40 mm	Wattage	2.1 W	
Height	900 mm	Net luminous flux	187 lm	
Drill hole	-	Light color (CCT)	2,700 K	Light beam/-effect
IP class	IP44	Light angle	21°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	80	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	F	


Tiga DL

Article number 209S | EAN code 8719979282110 | Warranty 6 years

Product		Light source		Accessories/contents supplied
Material	Plastic/Aluminum	Type	SMD LED	Mounting material
Color	Black	Replaceable	No	Connector F
Cable	3 m SPT-1W	Voltage	12 V AC/DC	Groundspike
Depth	63 mm	Start-up voltage	9V	Hex key
Width	68 mm	Wattage	4.2 W	Wall mounting
Height	88 mm	Net luminous flux	9 - 85 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect
IP class	IP67	Light angle	90°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	83	
		Switching on/off	10,000	
		Dimmable	Yes	
		Energy class	G	


Castor 4

Article number 178S | EAN code 5907800859898 | Warranty 6 years

Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Mounting material
Color	Anthracite	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Groundspike
Depth	100 mm	Start-up voltage	9V	Hex key
Width	60 mm	Wattage	3.5 W	
Height	95 mm	Net luminous flux	40 - 415 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect
IP class	IP67	Light angle	40°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	81	
		Switching on/off	10,000	
		Dimmable	Yes	
		Energy class	E	


Castor 8

Article number 179S | EAN code 5907800859904 | Warranty 6 years

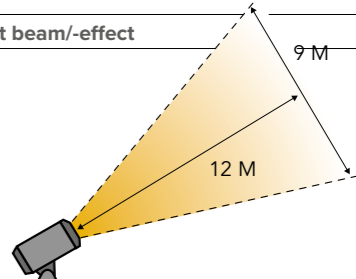Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Mounting material
Color	Anthracite	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Groundspike
Depth	115 mm	Start-up voltage	9V	Hex key
Width	60 mm	Wattage	8 W	
Height	95 mm	Net luminous flux	80 - 768 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect
IP class	IP67	Light angle	40°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	82	
		Switching on/off	10,000	
		Dimmable	Yes	
		Energy class	F	


Castor 9

Article number 180S | EAN code 5907800859911 | Warranty 6 years

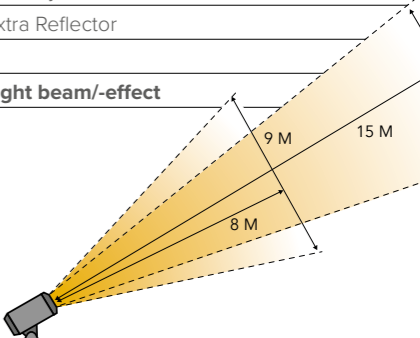Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	COB LED	Mounting material
Color	Anthracite	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Groundspike
Depth	120 mm	Start-up voltage	9V	Hex key
Width	60 mm	Wattage	9 W	Extra Reflector
Height	95 mm	Net luminous flux	65 - 670 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect
IP class	IP44	Light angle	30° / 60°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	91	
		Switching on/off	10,000	
		Dimmable	Yes	
		Energy class	F	


Juno Tube

Article number 213S | EAN code 8719979282677 | Warranty 6 years

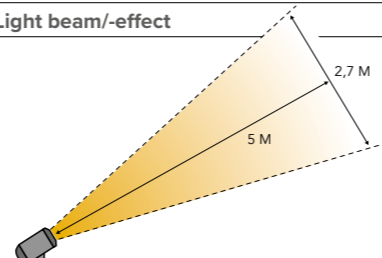Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Mounting material
Color	Anthracite	Replaceable	No	Connector F
Cable	3 m	Voltage	12 V AC/DC	Hex key
Depth	68 mm	Start-up voltage	9V	
Width	55 mm	Wattage	4 W	
Height	85 mm	Net luminous flux	356 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect
IP class	IP65	Light angle	30°	
Protection class	III	Average lifetime	25,000 hours	
Required	Tube	CRI	83	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	F	


Juno 2

Article number 193S | EAN code 8719979280826 | Warranty 6 years

Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Mounting material
Color	Anthracite	Replaceable	No	Connector F
Cable	2 m H05RN-F	Voltage	12 V AC/DC	Groundspike
Depth	68 mm	Start-up voltage	9V	Hex key
Width	55 mm	Wattage	1.5 W	Base
Height	85 mm	Net luminous flux	160 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect
IP class	IP67	Light angle	30°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	83	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	D	


Juno 4

Article number 194S | EAN code 8719979280833 | Warranty 6 years

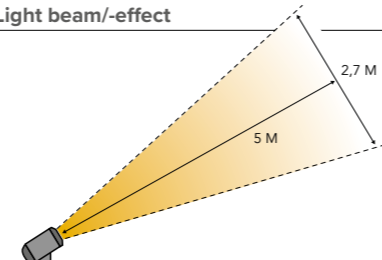Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Mounting material
Color	Anthracite	Replaceable	No	Connector F
Cable	2 m H05RN-F	Voltage	12 V AC/DC	Groundspike
Depth	68 mm	Start-up voltage	9V	Hex key
Width	55 mm	Wattage	4 W	Base
Height	85 mm	Net luminous flux	356 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect
IP class	IP67	Light angle	30°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	83	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	F	


Nilus

Article number 210S | EAN code 8719979282127 | Warranty 6 years

Product		Light source		Accessories/contents supplied
Material	ABS	Type	SMD LED	Connector F
Color	Black	Replaceable	No	Mounting material
Cable	5 m H05RN-F	Voltage	12 V AC/DC	
Depth	110 mm	Start-up voltage	9V	
Width	95 mm	Wattage	3.4 W	
Height	135 mm	Net luminous flux	420 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect
IP class	IP68	Light angle	30°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	82	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	F	




Avior

Article number 181S | EAN code 5907800859928 | Warranty 6 years

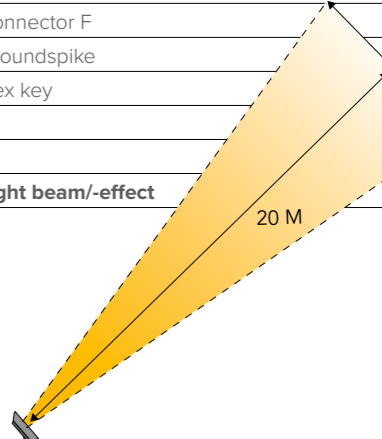Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	COB LED	Mounting material
Color	Anthracite	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Groundspike
Depth	68 mm	Start-up voltage	9V	Hex key
Width	180 mm	Wattage	16 W	
Height	125 mm	Net luminous flux	1007 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect
IP class	IP44	Light angle	100°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	80	
		Switching on/off	10,000	
		Dimmable	Yes	
		Energy class	F	

Spotlights


The object you want to illuminate is the most important factor when choosing the right spotlight. So take a good look at how much net luminous flux is needed to illuminate your entire tree or shrub.

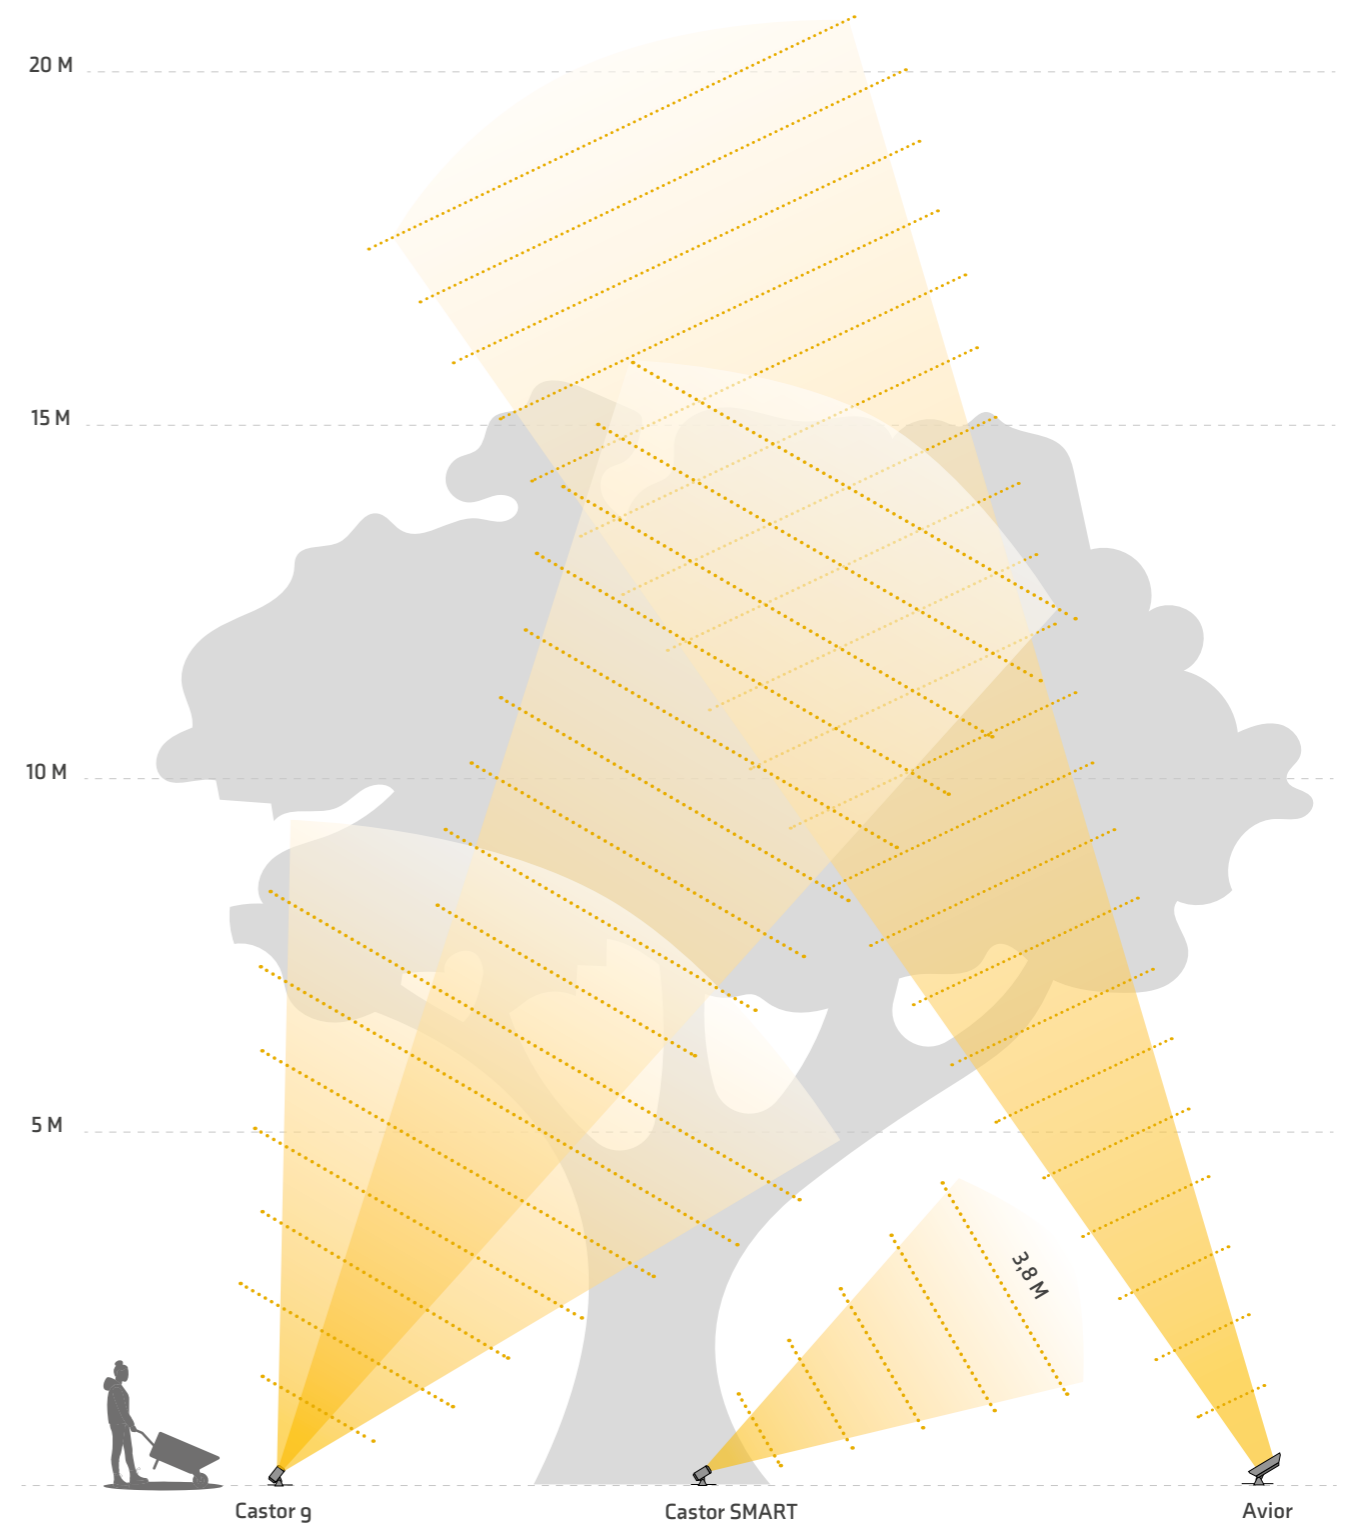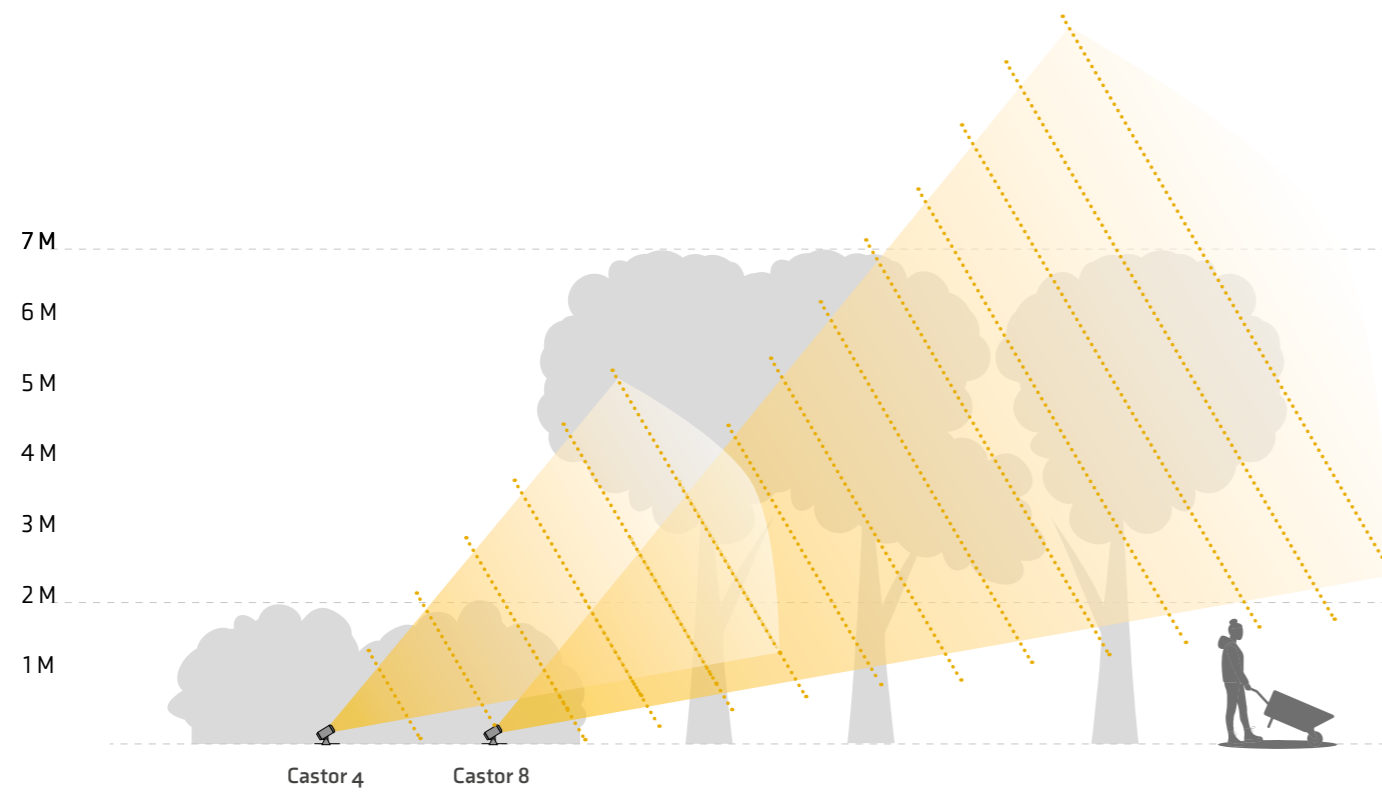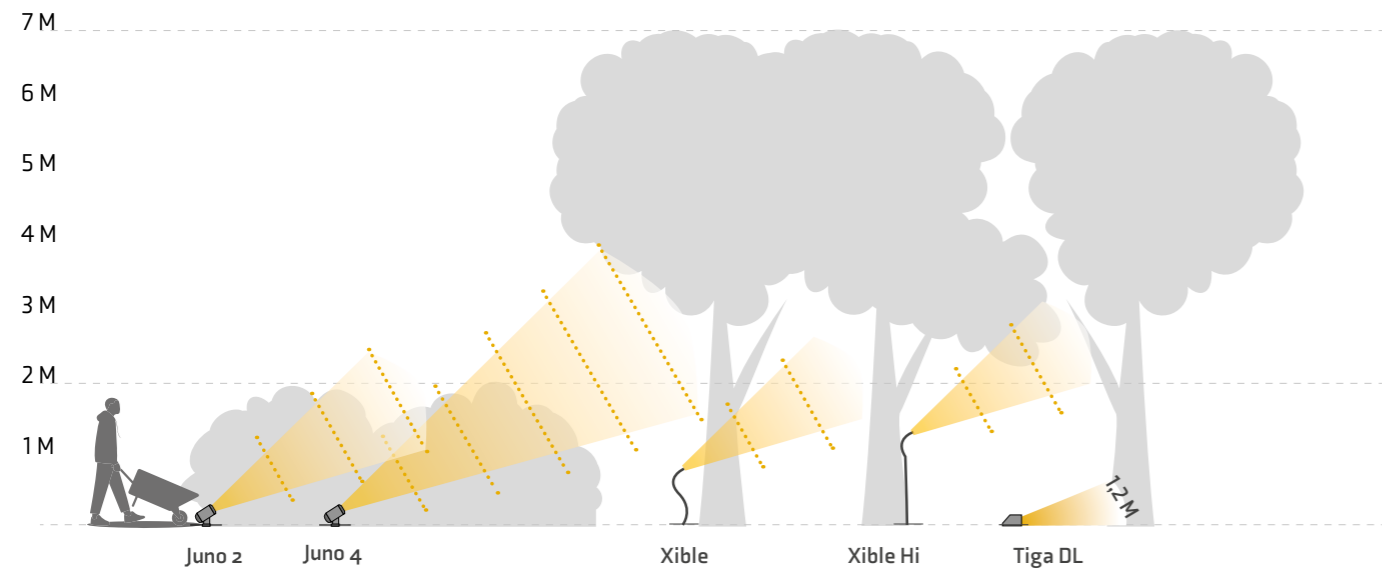

Decklights


Onyx 20

Article number 212D | EAN code 8719979282233 | Warranty 6 years

Product		Light source		Accessories/contents supplied
Material	Plastic	Type	SMD LED	Connector F
Color	Black	Replaceable	No	
Cable	1 m H05RN-F	Voltage	12 V AC/DC	
		Start-up voltage	9V	
Diameter	20 mm	Wattage	0.3 W	
Height	33 mm	Net luminous flux	1 lm	
Drill hole	20 mm	Light color (CCT)	2,700 K	Light beam/-effect
IP class	IP67	Light angle	-	
Protection class	III	Average lifetime	25,000 hours	
Driveable	Yes (car)	CRI	80	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	-	


Onyx 30 RS

Article number 240D | EAN code 8719979284350 | Warranty 6 years

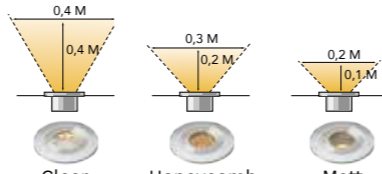Product		Light source		Accessories/contents supplied
Material	Stainless steel 316	Type	SMD LED	Extra lenses
Color	Silver gray	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Ground tube
		Start-up voltage	9V	
Diameter	45 mm	Wattage	0.5 W	
Height	59 mm	Net luminous flux	1 lm	
Drill hole	30 mm	Light color (CCT)	2,700 K	Light beam/-effect
IP class	IP67	Light angle	65°	
Protection class	III	Average lifetime	25,000 hours	
Driveable	Yes (car)	CRI	83	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	-	


Onyx 30 RA

Article number 241D | EAN code 8719979284367 | Warranty 6 years

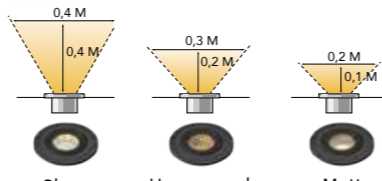Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Extra lenses
Color	Anthracite	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Ground tube
		Start-up voltage	9V	
Diameter	45 mm	Wattage	0.5 W	
Height	59 mm	Net luminous flux	1 lm	
Drill hole	30 mm	Light color (CCT)	2,700 K	Light beam/-effect
IP class	IP67	Light angle	65°	
Protection class	III	Average lifetime	25,000 hours	
Driveable	Yes (car)	CRI	83	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	-	


Onyx 60 RS

Article number 242D | EAN code 8719979284374 | Warranty 6 years

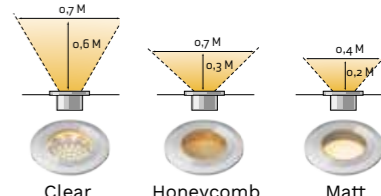Product		Light source		Accessories/contents supplied
Material	Stainless steel 316	Type	SMD LED	Extra lenses
Color	Silver gray	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Ground tube
		Start-up voltage	9V	
Diameter	75 mm	Wattage	5 W	
Height	59 mm	Net luminous flux	5 lm	
Drill hole	60 mm	Light color (CCT)	2,700 K	Light beam/-effect
IP class	IP67	Light angle	65°	
Protection class	III	Average lifetime	25,000 hours	
Driveable	Yes (car)	CRI	84	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	-	


Onyx 60 RA

Article number 243D | EAN code 8719979284381 | Warranty 6 years

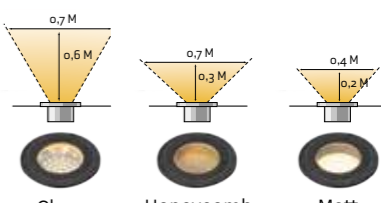Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Extra lenses
Color	Anthracite	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Ground tube
		Start-up voltage	9V	
Diameter	75 mm	Wattage	5 W	
Height	59 mm	Net luminous flux	5 lm	
Drill hole	60 mm	Light color (CCT)	2,700 K	Light beam/-effect
IP class	IP67	Light angle	65°	
Protection class	III	Average lifetime	25,000 hours	
Driveable	Yes (car)	CRI	84	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	-	


Onyx 90 RS

Article number 244D | EAN code 8719979284398 | Warranty 6 years

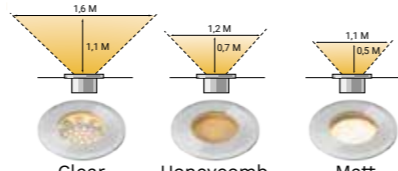
Product		Light source		Accessories/contents supplied
Material	Stainless steel 316	Type	SMD LED	Extra lenses
Color	Silver gray	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Ground tube
		Start-up voltage	9V	
Diameter	105 mm	Wattage	2 W	
Height	59 mm	Net luminous flux	18 lm	
Drill hole	90 mm	Light color (CCT)	2,700 K	Light beam/-effect 
IP class	IP67	Light angle	80°	
Protection class	III	Average lifetime	25,000 hours	
Driveable	Yes (car)	CRI	84	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	G	

Onyx 90 RA

Article number 245D | EAN code 8719979284404 | Warranty 6 years

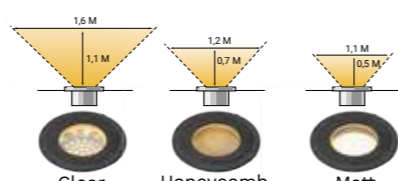Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Extra lenses
Color	Anthracite	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Ground tube
		Start-up voltage	9V	
Diameter	105 mm	Wattage	2 W	
Height	59 mm	Net luminous flux	18 lm	
Drill hole	90 mm	Light color (CCT)	2,700 K	Light beam/-effect 
IP class	IP67	Light angle	80°	
Protection class	III	Average lifetime	25,000 hours	
Driveable	Yes (car)	CRI	84	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	G	

Decklights are most commonly used as orientation lighting. The table below allows you to easily compare the different decklights and choose exactly the right light.

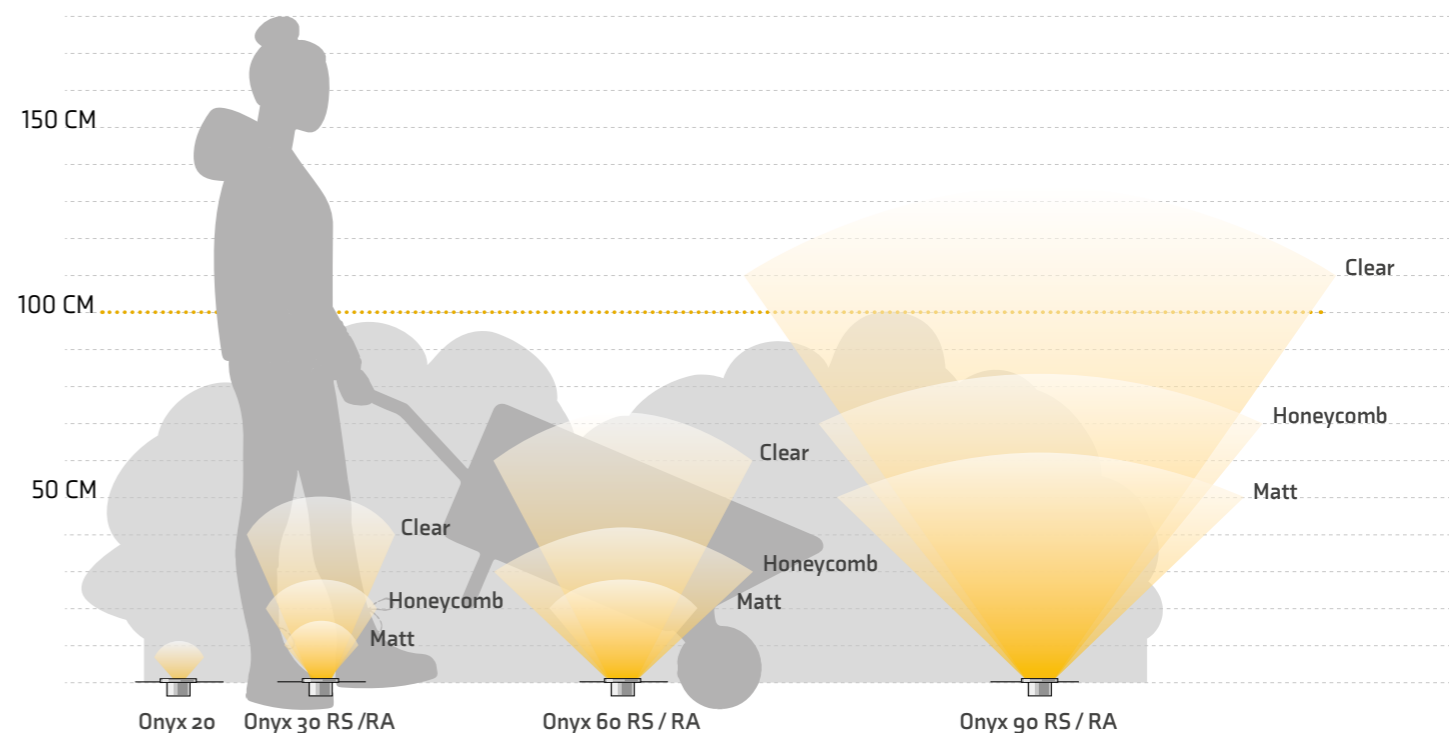


Uplights

Atik R1

Article number 186U | EAN code 5907800859973 | Warranty 6 years


Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	COB LED	Ground tube
Color	Black	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Hex key
		Start-up voltage	9V	Extra Reflector
Diameter	120 mm	Wattage	9 W	
Height	135 mm	Net luminous flux	65 - 713 lm	
Drill hole	100 mm	Light color (CCT)	3,000 K	Light beam/-effect
IP class	IP67	Light angle	30° / 60°	
Protection class	III	Average lifetime	25,000 hours	
Driveable	No	CRI	91	
		Switching on/off	10,000	
		Dimmable	Yes	
		Energy class	F	

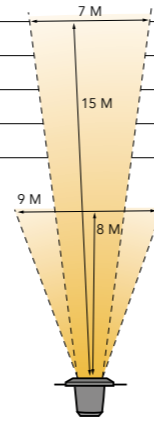

Nomia

Article number 207U | EAN code 8719979282097 | Warranty 6 years



Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Ground tube
Color	Black	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	
		Start-up voltage	9V	
Diameter	90 mm	Wattage	3 W	
Height	125 mm	Net luminous flux	344 lm	
Drill hole	70 mm	Light color (CCT)	3,000 K	Light beam/-effect
IP class	IP67	Light angle	40°	
Protection class	III	Average lifetime	25,000 hours	
Driveable	No	CRI	82	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	F	

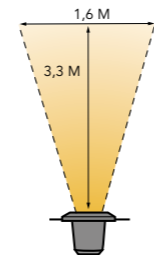

Agate

Article number 102U | EAN code 5907800856774 | Warranty 6 years


Product		Light source		Accessories/contents supplied
Material	Stainless steel 316	Type	SMD LED (MR16)	Ground tube
Color	Silver gray	Replaceable	Yes	Connector F
Cable	0.5 m H05RN-F	Voltage	12 V AC/DC	Hex key
		Start-up voltage	9V	
Diameter	115 mm	Wattage	2.6 W	
Height	113 mm	Net luminous flux	195 lm	
Drill hole	90 mm	Light color (CCT)	3,000 K	Light beam/-effect
IP class	IP67	Light angle	36°	
Protection class	III	Average lifetime	25,000 hours	
Driveable	No	CRI	83	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	F	

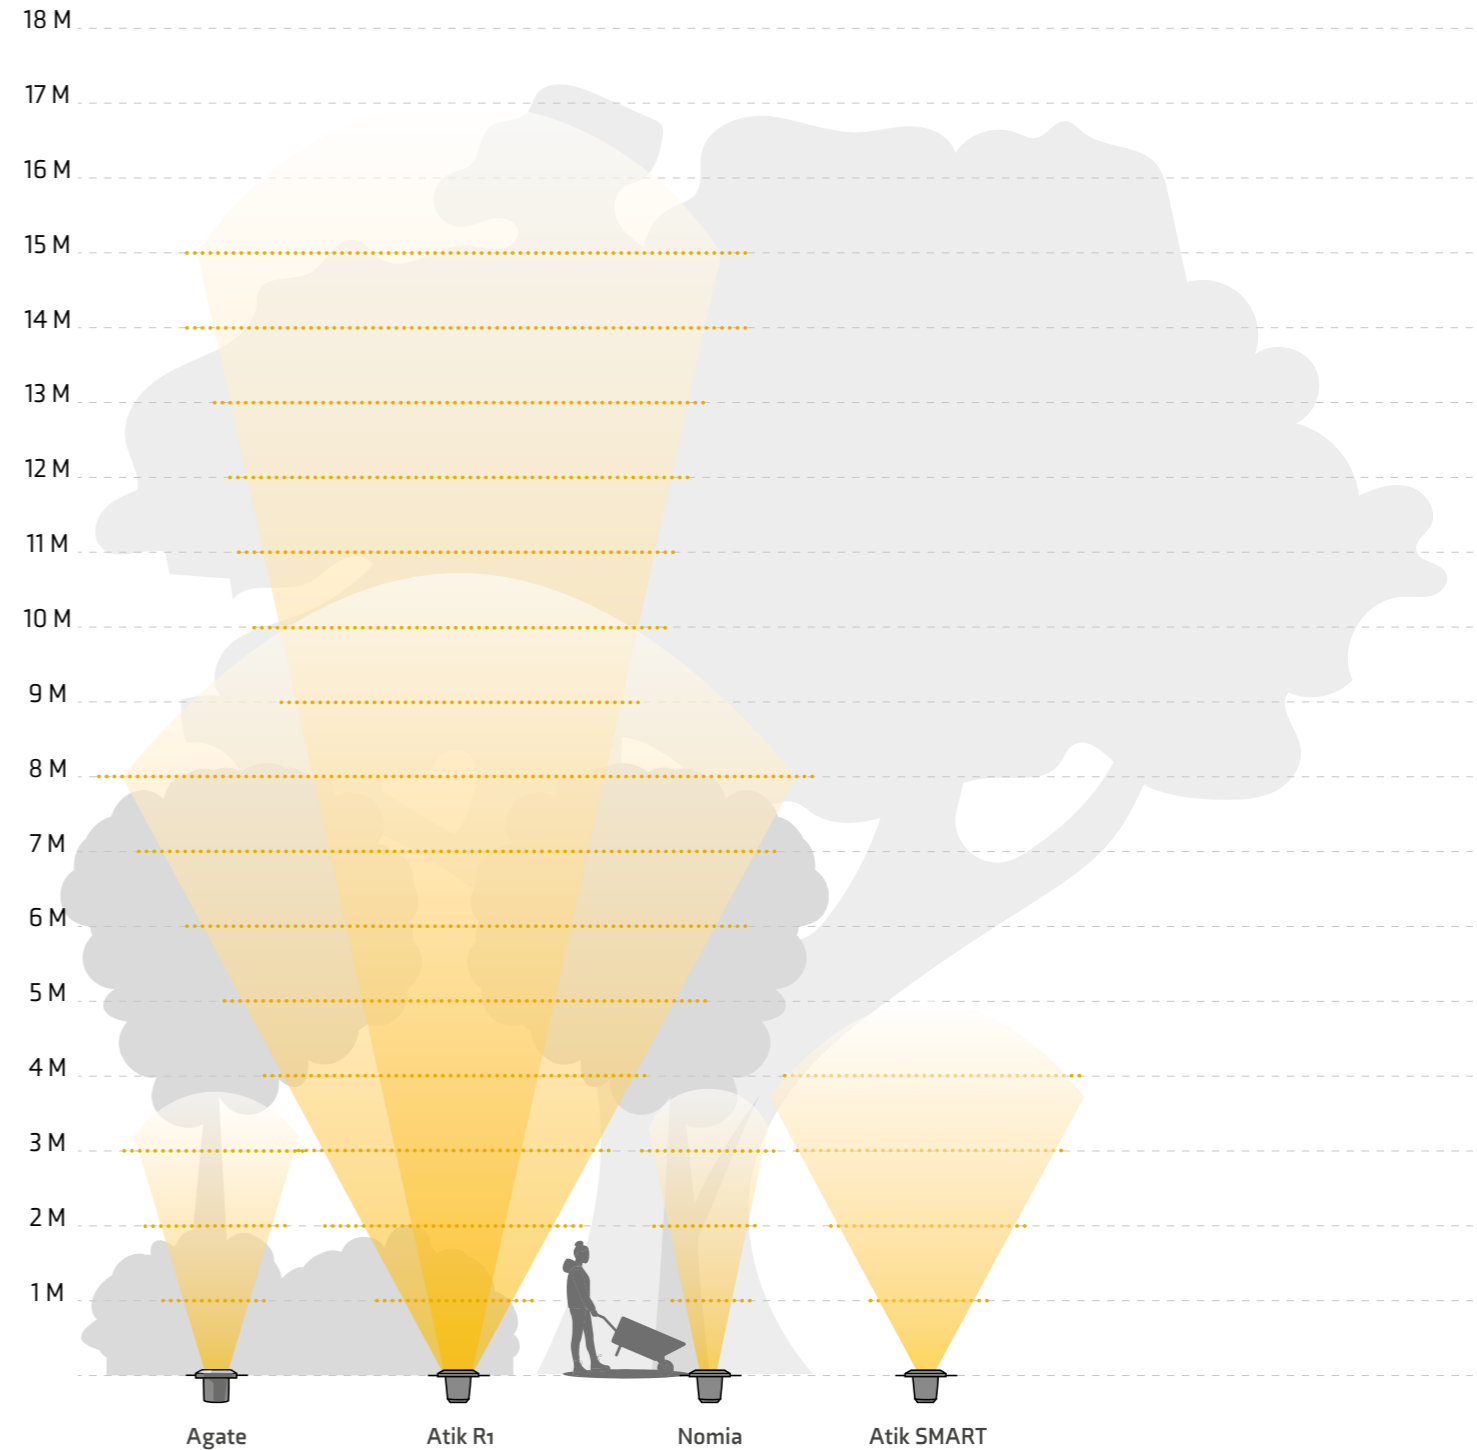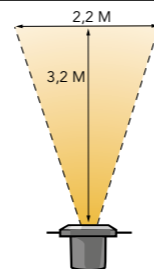


Post lights

Erba


Article number 222P | EAN code 8719979283643 | Warranty 6 years


Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Connector F (3x)
Color	Anthracite	Replaceable	No	Groundspike (3x)
Cable	1 m H05RN-F	Voltage	12 V AC/DC	
		Start-up voltage	9V	
Diameter	20 mm	Wattage	1.1 W (3x)	
Height	904 + 734 + 564 mm	Net luminous flux	15 lm each	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect 
IP class	IP44	Light angle	-	
Protection class	III	Average lifetime	25,000 hours	
		CRI	81	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	F	

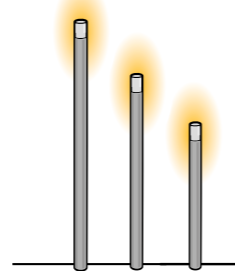

Eros Hi


Article number 214P | EAN code 8719979282691 | Warranty 6 years

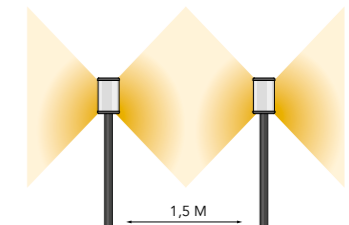
Product		Light source		Accessories/contents supplied
Material	Aluminum/Glass	Type	Filament LED	Mounting material
Color	Black	Replaceable	Yes	Connector F
Cable	1.2 m H05RN-F	Voltage	12 V AC/DC	Groundspike
		Start-up voltage	9V	Hex key
Diameter	115 mm	Wattage	3.5 W	
Height	870 mm	Net luminous flux	277 lm	
Drill hole	-	Light color (CCT)	2,200 K	Light beam/-effect 
IP class	IP44	Light angle	-	
Protection class	III	Average lifetime	25,000 hours	
		CRI	80	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	G	

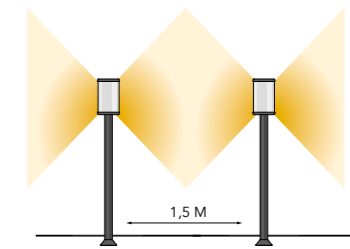

Erba Mid


Article number 223P | EAN code 8719979283650 | Warranty 6 years


Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Connector F
Color	Anthracite	Replaceable	No	Groundspike
Cable	1 m H05RN-F	Voltage	12 V AC/DC	
		Start-up voltage	9V	
Diameter	20 mm	Wattage	1.1 W	
Height	734 mm	Net luminous flux	15 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect 
IP class	IP44	Light angle	-	
Protection class	III	Average lifetime	25,000 hours	
		CRI	81	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	F	



Alon


Article number 221P | EAN code 8719979283469 | Warranty 6 years

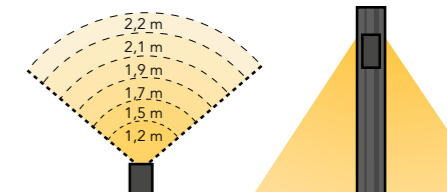
Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Mounting material
Color	Anthracite	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Groundspike
		Start-up voltage	9V	Hex key
Depth	160 mm	Wattage	3.3 W	
Width	64 mm	Net luminous flux	30 - 365 lm	
Height	700 mm	Light color (CCT)	3,000 K	Light beam/-effect 
Drill hole	-	Light angle	70°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	80	
		Switching on/off	10,000	
		Dimmable	Yes	
		Energy class	G	

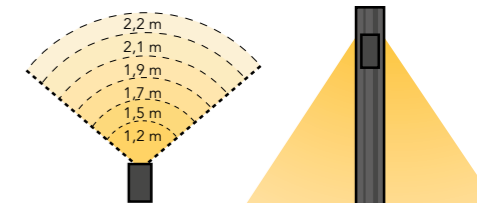

Eros Lo


Article number 217P | EAN code 8719979282813 | Warranty 6 years

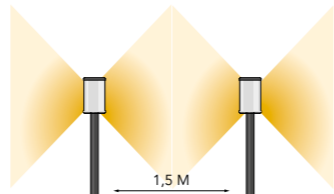
Product		Light source		Accessories/contents supplied
Material	Aluminum/Glass	Type	Filament LED	Mounting material
Color	Black	Replaceable	Yes	Connector F
Cable	1.2 m H05RN-F	Voltage	12 V AC/DC	Groundspike
		Start-up voltage	9V	Hex key
Diameter	115 mm	Wattage	3.5 W	
Height	550 mm	Net luminous flux	277 lm	
Drill hole	-	Light color (CCT)	2,200 K	Light beam/-effect 
IP class	IP44	Light angle	-	
Protection class	III	Average lifetime	25,000 hours	
		CRI	80	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	G	

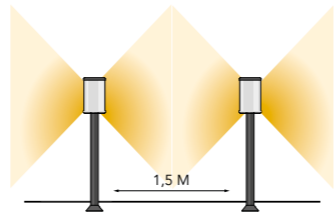

Oberon Lo


Article number 190P | EAN code 8719979280796 | Warranty 6 years

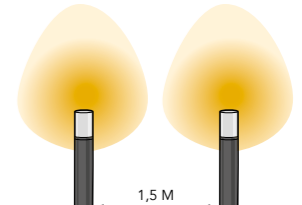Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Mounting material
Color	Anthracite	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Groundspike
		Start-up voltage	9V	Foam ring
Diameter	64 mm	Wattage	4 W	Hex key
Height	420 mm	Net luminous flux	40 - 345 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect 
IP class	IP44	Light angle	-	
Protection class	III	Average lifetime	25,000 hours	
		CRI	82	
		Switching on/off	10,000	
		Dimmable	Yes	
		Energy class	F	

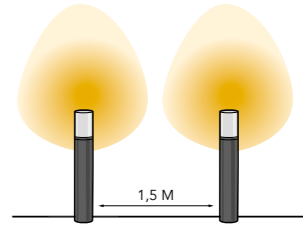


Oberon Hi

Article number 191P | EAN code 8719979280802 | Warranty 6 years

Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Mounting material
Color	Anthracite	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Groundspike
		Start-up voltage	9V	Foam ring
Diameter	64 mm	Wattage	4 W	Hex key
Height	665 mm	Net luminous flux	40 - 345 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect 
IP class	IP44	Light angle	-	
Protection class	III	Average lifetime	25,000 hours	
		CRI	82	
		Switching on/off	10,000	
		Dimmable	Yes	
		Energy class	F	


Oberon DL

Article number 192P | EAN code 8719979282080 | Warranty 6 years

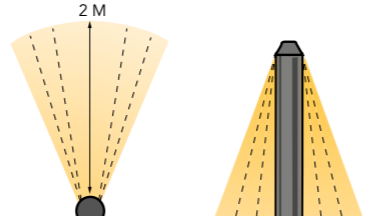Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	COB LED	Mounting material
Color	Anthracite	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Groundspike
Depth	110 mm	Start-up voltage	9V	Hex key
Diameter	93 mm	Wattage	9 W	3x faceplates for light angle
Height	600 mm	Net luminous flux	75 - 288 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect 
IP class	IP44	Light angle	Variable	
Protection class	III	Average lifetime	25,000 hours	
		CRI	91	
		Switching on/off	10,000	
		Dimmable	Yes	
		Energy class	F	

Lino


Article number 264P | EAN code 8719979285050 | Warranty 6 years

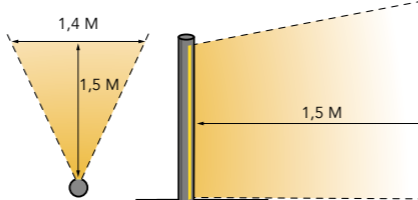Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	COB Strip	Mounting material
Color	Anthracite	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Groundspike
		Start-up voltage	9V	Hex key
Diameter	40 mm	Wattage	6 W	
Height	600 mm	Net luminous flux	27 - 140 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect 
IP class	IP67	Light angle	-	
Protection class	III	Average lifetime	25,000 hours	
		CRI	90	
		Switching on/off	10,000	
		Dimmable	Yes	
		Energy class	G	

Wall lights


Tiga Corner

Article number 208S | EAN code 8719979282103 | Warranty 6 years

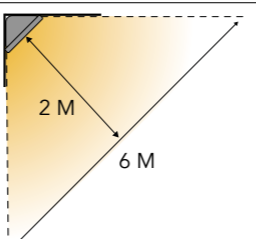Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Mounting material
Color	Black	Replaceable	No	Bracket
Cable	3 m SPT-1W	Voltage	12 V AC/DC	Connector F
Depth	105 mm	Start-up voltage	9V	
Width	93 mm	Wattage	3.5	
Height	46 mm	Net luminous flux	106 lm	
Drill hole	-	Light color (CCT)	2,700 K	Light beam/-effect 
IP class	IP44	Light angle	113°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	80	
		Switching on/off	10,000	
		Dimmable	Yes	
		Energy class	G	


Kuma

Article number 184W | EAN code 5907800859959 | Warranty 6 years

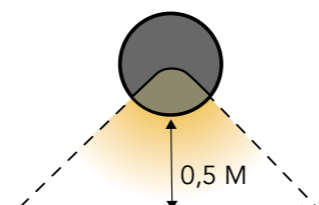Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Mounting material
Color	Black	Replaceable	No	Connector F
Cable	3 m SPT-1W	Voltage	12 V AC/DC	Hex key
		Start-up voltage	9V	
Depth	35 mm	Wattage	6 W	
Diameter	145 mm	Net luminous flux	105 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect 
IP class	IP44	Light angle	90°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	83	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	G	


Quartz

Article number 196W | EAN code 8719979281083 | Warranty 6 years

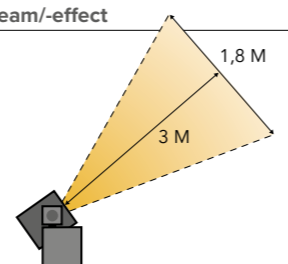Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED (MR11)	Mounting material
Color	Black	Replaceable	Yes	Connector F
Cable	3 m SPT-1W	Voltage	12 V AC/DC	Groundspike
Depth	88 mm	Start-up voltage	9V	
Width	50 mm	Wattage	1.8 W	
Height	105 mm	Net luminous flux	137 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect 
IP class	IP44	Light angle	30°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	83	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	F	


Ixion Small 230V

Article number 230W | EAN code 8719979283810 | Warranty 6 years

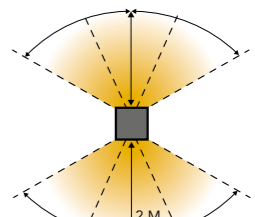Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	GW-A310-6	Mounting material
Color	Anthracite	Replaceable	No	Hex key
Cable	3 m SPT-1W	Voltage	230V	Spacer
Depth	100 mm	Start-up voltage	-	
Width	100 mm	Wattage	3 W (x2)	
Height	100 mm	Net luminous flux	482 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect 
IP class	IP65	Light angle	120°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	80	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	E	


Ixion

Article number 182W | EAN code 5907800859935 | Warranty 6 years

Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	COB LED	Mounting material
Color	Anthracite	Replaceable	No	Connector F
Cable	3 m SPT-1W	Voltage	12 V AC/DC	Hex key
Depth	110 mm	Start-up voltage	9V	
Width	110 mm	Wattage	4.5 W (x2)	
Height	110 mm	Net luminous flux	45 - 575 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect 
IP class	IP44	Light angle	0 - 90°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	84	
		Switching on/off	10,000	
		Dimmable	Yes	
		Energy class	G	


Tiga Wall

Article number 249W | EAN code 8719979284435 | Warranty 6 years

Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	COB LED	Mounting material
Color	Anthracite	Replaceable	No	Connector F
Cable	3 m SPT-1W	Voltage	12 V AC/DC	1x faceplate for light angle
Depth	42 mm	Start-up voltage	9V	
Width	75 mm	Wattage	4	
Height	75 mm	Net luminous flux	67 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect 
IP class	IP67	Light angle	-	
Protection class	III	Average lifetime	25,000 hours	
		CRI	80	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	G	


Deco 30 Smart

Article number 254N | EAN code 8719979284572 | Warranty 6 years

Product		Light source		Accessories/contents supplied
Material	Polyethylene	Type	SMD LED (MR16)	Mounting material
Color	White	Replaceable	Yes	Connector F
Cable	1.5 m H05RN-F	Voltage	12 V AC/DC	Base
Length	300 mm	Start-up voltage	9V	Plug
Width	300 mm	Wattage	5 W	
Height	300 mm	Net luminous flux	254 lm	
		Light color (CCT)	RGB	Light beam/-effect
IP class	IP44	Light angle	All-round	
Protection class	III	Average lifetime	25,000 hours	
		CRI	-	
Smart	Yes, Zigbee	Switching on/off	10,000	
Required	Gateway	Dimmable	Yes (app)	
		Energy class	G	


Deco 40 Smart

Article number 255N | EAN code 8719979284589 | Warranty 6 years

Product		Light source		Accessories/contents supplied
Material	Polyethylene	Type	SMD LED (MR16)	Mounting material
Color	White	Replaceable	Yes	Connector F
Cable	1.5 m H05RN-F	Voltage	12 V AC/DC	Base
Length	400 mm	Start-up voltage	9V	Plug
Width	400 mm	Wattage	5 W	
Height	400 mm	Net luminous flux	242 lm	
		Light color (CCT)	RGB	Light beam/-effect
IP class	IP44	Light angle	All-round	
Protection class	III	Average lifetime	25,000 hours	
		CRI	-	
Smart	Yes, Zigbee	Switching on/off	10,000	
Required	Gateway	Dimmable	Yes (app)	
		Energy class	G	


Deco 50 Smart

Article number 256N | EAN code 8719979284596 | Warranty 6 years

Product		Light source		Accessories/contents supplied
Material	Polyethylene	Type	SMD LED (MR16)	Mounting material
Color	White	Replaceable	Yes	Connector F
Cable	1.5 m H05RN-F	Voltage	12 V AC/DC	Base
Length	500 mm	Start-up voltage	9V	Plug
Width	500 mm	Wattage	5 W	
Height	500 mm	Net luminous flux	220 lm	
		Light color (CCT)	RGB	Light beam/-effect
IP class	IP44	Light angle	All-round	
Protection class	III	Average lifetime	25,000 hours	
		CRI	-	
Smart	Yes, Zigbee	Switching on/off	10,000	
Required	Gateway	Dimmable	Yes (app)	
		Energy class	G	


Atik Smart

Article number 246N | EAN code 8719979284411 | Warranty 6 years

Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED (MR16)	Ground tube
Color	Black	Replaceable	Yes	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	
		Start-up voltage	9V	
Diameter	120 mm	Wattage	5 W	
Height	135 mm	Net luminous flux	211 lm	
Drill hole	100 mm	Light color (CCT)	RGB	Light beam/-effect
IP class	IP67	Light angle	30° / 60°	
Protection class	III	Average lifetime	25,000 hours	
Driveable	No	CRI	80	
		Switching on/off	10,000	
Smart	Yes, Zigbee	Dimmable	Yes (app)	
Required	Gateway	Energy class	F	


Castor Smart

Article number 200N | EAN code 8719979281526 | Warranty 6 years

Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED (MR16)	Mounting material
Color	Anthracite	Replaceable	Yes	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Groundspike
Depth	120 mm	Start-up voltage	9V	Hex key
Width	60 mm	Wattage	5 W	
Height	95 mm	Net luminous flux	207 lm	
Drill hole	-	Light color (CCT)	RGB	Light beam/-effect
IP class	IP44	Light angle	40°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	80	
Smart	Yes, Zigbee	Switching on/off	10,000	
Required	Gateway	Dimmable	Yes (app)	
		Energy class	G	


Senso Smart


Article number 265N | EAN code 8719979285067 | Warranty 6 years

Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED (MR16)	Mounting material
Color	Black	Replaceable	No	Connector F
Cable	3 m H05RN-F	Voltage	12 V AC/DC	
Depth	30.5mm	Start-up voltage	9V	
Width	162 mm	Wattage	7 W	
Height	38.6 mm	Net luminous flux	640 lm	
		Light color (CCT)	RGB	Light beam/-effect
IP class	IP67	Light angle	90°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	80	
Smart	Yes, Zigbee	Switching on/off	10,000	
Required	Gateway	Dimmable	Yes (app)	
		Energy class	F	

Oberon Smart

Article number 199N | EAN code 8719979281502 | Warranty 6 years

Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED (MR16)	Mounting material
Color	Anthracite	Replaceable	Yes	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Groundspike
		Start-up voltage	9V	Hex key
Diameter	64 mm	Wattage	5 W	
Height	665 mm	Net luminous flux	212 lm	
Drill hole	-	Light color (CCT)	RGB	Light beam/-effect
IP class	IP44	Light angle	-	
Protection class	III	Average lifetime	25,000 hours	
		CRI	80	
Smart	Yes, Zigbee	Switching on/off	10,000	
Required	Gateway	Dimmable	Yes (app)	
		Energy class	G	



LIGHTPRO